


The Caruso™

FP7000 SERIES FANS



SPECIFICATION SHEET

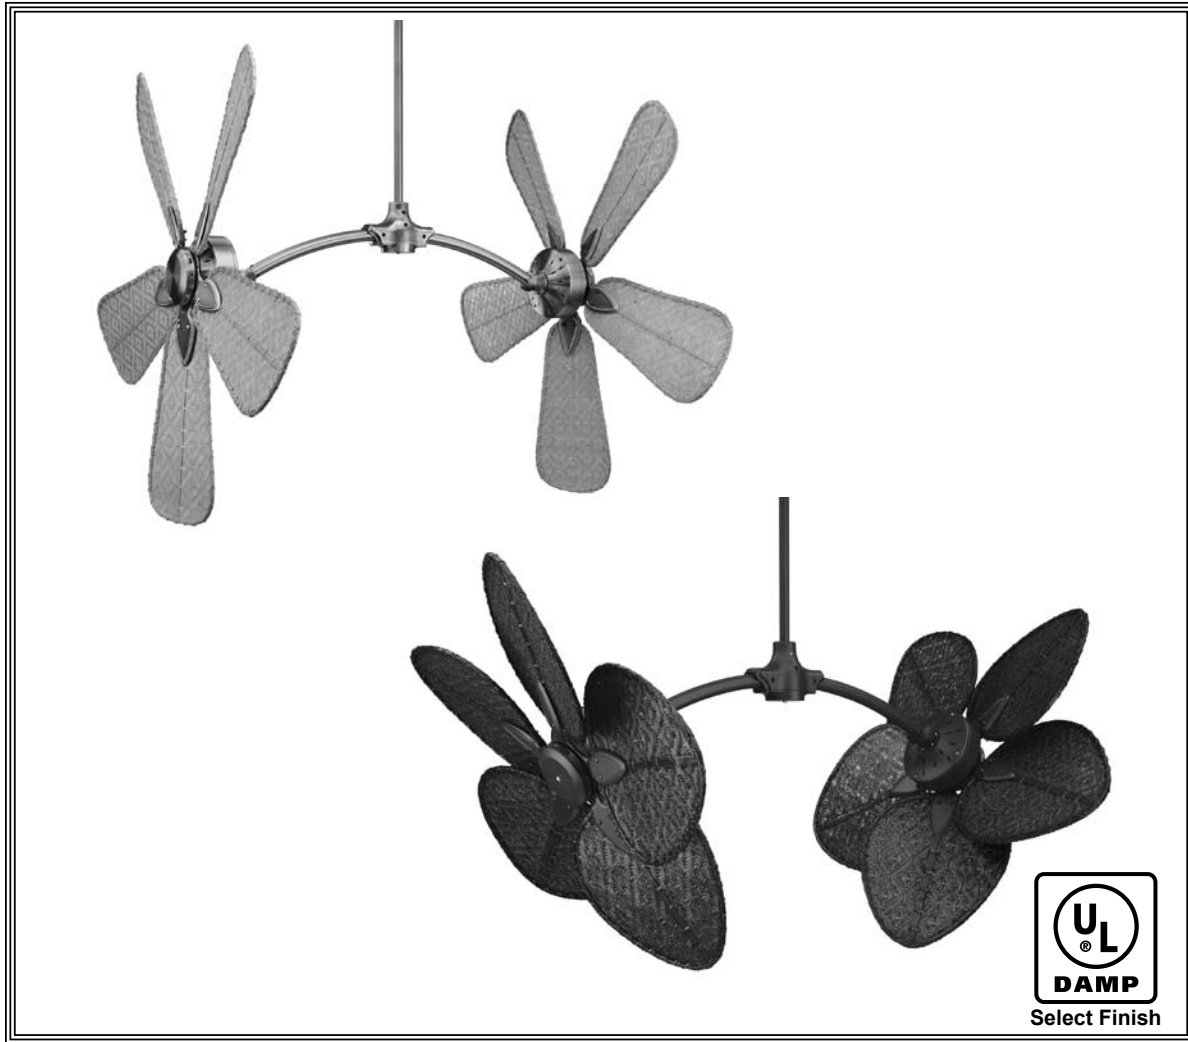

celebrating 25 years

Product Specifications Subject To Change



Catalog #	Finish
FP7000AB	Antique Brass
FP7000OB	Oil-Rubbed Bronze (Damp)
FP7000PW	Pewter

INSTALLATION REQUIREMENTS:

Fan must be secured to a structural member, such as a ceiling joist, capable of withstanding a load of at least 100 lbs. A 3/8" x 5" long lag bolt passes through loop in ceiling support cable, hanger bracket plate, and into wood structural member above.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

Powerful twin 188 x 25 motors are designed for optimal performance with this fan. 220 VAC, 50 Hz export version available (oil-rubbed bronze and pewter finishes only).

FAN SPEEDS:

2-speed reversible (located on switch cup): High—95 rpm; Low—40 rpm

DESIGN FEATURES:

Adjustable motor heads with five angles of blade tilt; Vertical, 15°, 30°, 45°, and 60° from vertical.

BLADES:

A variety of palm, bamboo, and all-weather composite blades are available—sold separately. See chart on page 16, our catalog, or www.fanimation.com for blade options.

CONTROL OPTIONS:

C3-CA 2-speed wall control is included. Optional C24 remote control and C25 wall control available with the use of optional SW70 switch cap receiver—all sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:


Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 24" (DR1-24) downrod. Optional downrods available in 6", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Shorter downrods may be used with various motor angles and blade length combinations (see chart). Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°.

ACCESSORY OPTIONS:

Various accessory options are available—see our catalog or visit www.fanimation.com.

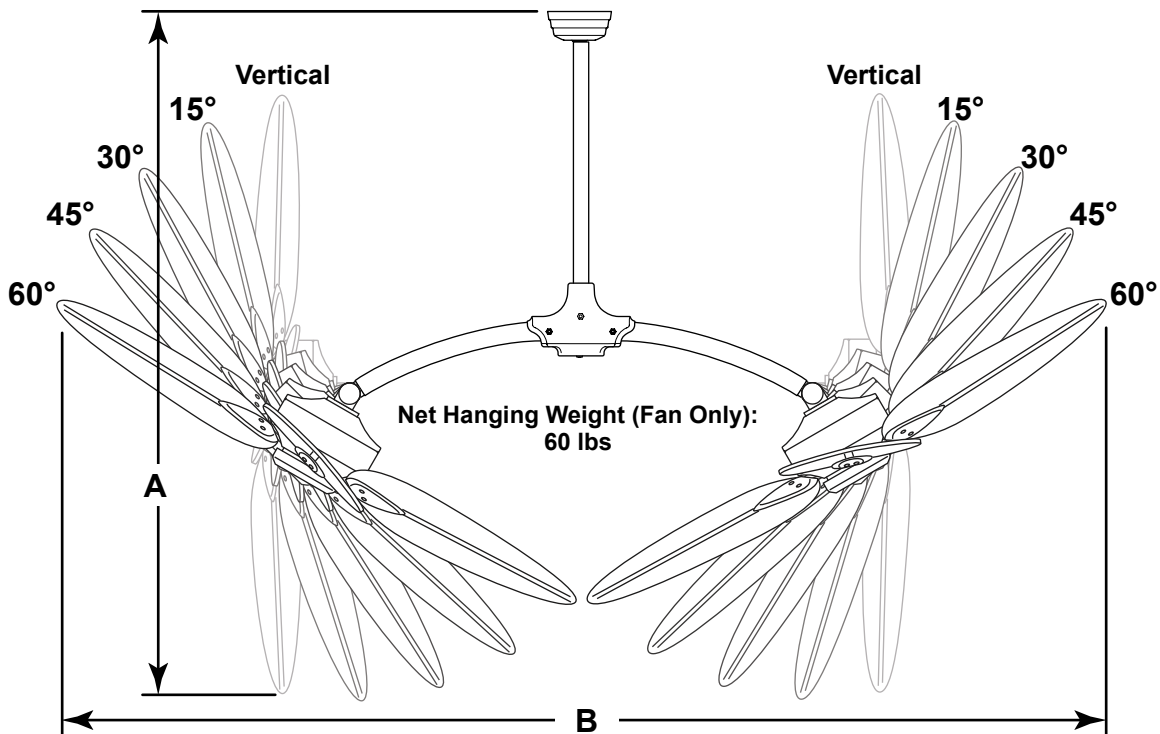










CARUSO® BLADE SPACING SPECS CHART						
Motor Tilt Angle	18" Blades		20" Blades		22" Blades	
	Dim. "A" w/24" DR	Dim. "B"	Dim. "A" w/24" DR	Dim. "B"	Dim. "A" w/24" DR	Dim. "B"
Vertical	54½"	56½"	56½"	56½"	58½"	56½"
15°	55"	63½"	58"	64½"	59"	65½"
30°	54½"	73"	56"	75"	58"	77"
45°	52½"	80½"	54"	83"	55"	86"
60°	49"	85"	50"	88½"	51"*	92"*

*22" Natural Palm Blades Are NOT To Be Used At The 60° Setting

Dimensions shown in inches

CARUSO™ CEILING / DOWNROD SPECS CHART						
Motor Tilt Angle	18" Blades		20" Blades		22" Blades	
	Minimum Ceiling Height	Minimum DR Length	Minimum Ceiling Height	Minimum DR Length	Minimum Ceiling Height	Minimum DR Length
Vertical	11'	18"	11'9"	24"	12'	24"
15°	11'	18"	11'9"	24"	12'	24"
30°	10'6"	12"	11'3"	18"	11'6"	18"
45°	10'6"	12"	10'6"	12"	10'6"	12"
60°	9'6"	6"	9'6"	6"	9'9"	6"

Dimensions shown in feet-inches

Illustration	Catalog Number	Finish	Description	Qty.
ALL-WEATHER BLADES (Sold Separately - For Damp Location Use)				
 U.S. Patent No. D433,118	CABPP4	Natural	22" Narrow Oval Palm	10
	CABPP4BR	Brown	22" Narrow Oval Palm	10
	CABPP4GR	Green	22" Narrow Oval Palm	10
 U.S. Patent No. D450,380	CABPD2A	Antique	18" Wide Oval Bamboo	10
 U.S. Patent No. D437,406	CABPD4A	Antique	22" Narrow Oval Bamboo	10
	CABPD5A	Antique	18" Narrow Oval Bamboo	10
	CABPW10CY	Cherry	20" Narrow Traditional	10
	CABPW10WO	Washed Oak	20" Narrow Traditional	10
BAMBOO BLADES (Sold Separately - For Damp Location Use)				
 US Pat. No. Des. 450,380	CAISD2A	Antique	18" Wide Oval Bamboo	10
 US Pat. No. Des. 433,118	CAISD4A	Antique	22" Narrow Oval Bamboo	10
	CAISD5A	Antique	18" Narrow Oval Bamboo	10
	CAISD4C	Clear	22" Narrow Oval Bamboo	10
 US Pat. No. Des. 433,749	CAISD7A	Antique	22" Standard Oar Bamboo	10
	CAISD8A	Antique	18" Standard Oar Bamboo	10
	CAISD7C	Clear	22" Standard Oar Bamboo	10
PALM BLADES (Sold Separately - Not For Damp Location Use)				
 U.S. TM Registration No. 2,812,018	CAISP2	Natural	18" Wide Oval Palm	10
 U.S. Patent No. D433,118	CAISP4	Natural	22" Narrow Oval Palm *	10
	CAISP4RB	Red/Brown	22" Narrow Oval Palm *	10
	CAISP5	Natural	18" Narrow Oval Palm	10

*22" Natural Palm Blades Are NOT To Be Used At The 60° Setting



Copyright 2009 Fanimation, Inc.

10983 Bennett Parkway
 Zionsville, IN 46077
 Toll Free (888) 567-2055
 FAX (866) 482-5215
 Outside U.S. call (317) 733-4113
 Visit Our Website www.fanimation.com



2009/01