

The Loreto Bay™

FPS7840




SPECIFICATION SHEET



Product Specifications subject to change

The Loreto Bay™ Fan Assembly – FPS7840**

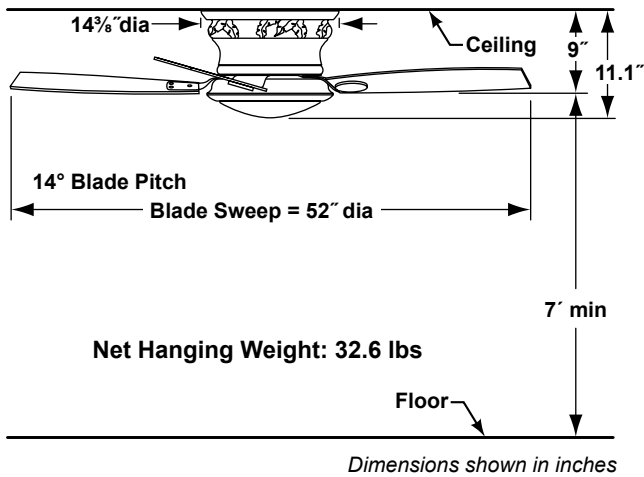

Available Finishes	
SB	Sedona Beige
VZ	Venetian Bronze

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 20 motor is designed for optimal performance with this fan.

FAN SPEEDS:

High—148 rpm; Med—102 rpm; Low—58 rpm

BLADES:

A set of five reversible dark cherry/teak finish wood blades is included.

CONTROL OPTIONS:

C20 hand-held reversing remote control with canopy-style receiver unit (RECAN68) is included. Push button remote control has 3 fan speeds, infinite light levels, reverse and off button. Optional C21 wall control is available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

3-bulb downlight fixture with three 40-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts.


LOCATION USE:

Fan is rated for dry locations only



Copyright 2009 Fanimation, Inc.

**10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215
Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com**



2009/01