

gn KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign Kl

FLEXIBLE LED STRIPS

HIGH CRI • LOW VOLTAGE • INDOOR AND OUTDOOR

gn KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign Kl



gn KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign Kl

KLUŠ Inspiring Solutions

UL LISTED, HIGH CRI LED STRIPS

- p. 5** 4.8 Watt / M, 60 PCS / M

- p. 6** 4.8 Watt / M, 60 PCS / M, side emitting LED

- p. 7** 9.6 Watt / M, 120 PCS / M

- p. 8** 14.4 Watt / M, 120 PCS / M

- p. 10** 18.2 Watt / M, 266 PCS / M, high density LED

WATERPROOF IP 65 FLEXIBLE LED STRIPS

- p. 13** 4.8 Watt / M, 60 PCS / M

- p. 14** 4.8 Watt / M, 60 PCS / M, side emitting LED

- p. 15** 9.6 Watt / M, 120 PCS / M

- p. 16** 9.6 Watt / M, 120 PCS / M, gel coated LED dedicated to fit HR-ALU extrusion

- p. 17** 14.4 Watt / M, 120 PCS / M

- p. 18** 18.2 Watt / M, 266 PCS / M, high density LED

RGB FLEXIBLE LED STRIPS

- p. 21** 14.4 Watt / M, 120 PCS / M

WATERPROOF IP 65 RGB FLEXIBLE LED STRIPS

- p. 23** 14.4 Watt / M, 120 PCS / M

LED ACCESSORIES

- p. 24**

INSTRUCTIONS

- p. 31**



HIGH QUALITY

All LEDs are UL Listed which guarantees their high quality. We offer a 4 year warranty on our LEDs.



CRI

One of the essential parameters of LEDs is CRI – Color Rendering index. It is a quantitative measure of the ability of a light source to reveal the colors of various objects faithfully in comparison with an ideal or natural light source. Our LEDs have one of the highest CRI's 90+.

Each of our LED strips is offered in four standard color temperatures from warm white 2700K to cool white / day light 4000K. Custom colors are available as well.

RGB LED strips can reproduce a broad array of colors that can be controlled with the use of an RGB controller.



IP 65 Water Resistance rating

LEDs can be used in an outside setting and are water-resistant.

EASY ASSEMBLY


We also offer various accessories for our LED strips that enable their easy assembly. Accessories include: connectors that allow connecting LEDs without soldering, wires with female and male connectors, dimmers and remote controls.

The KLUS offer includes over 50 different aluminum extrusions. All LED strips are dedicated and fit into KLUS extrusions. The extrusions have versatile applications and can be mounted to various surfaces such as: drywall, wood , grooves as well as areas hardly accessible for mounting tools.



4.8 Watt / M, 12 V

Flexible LED strips

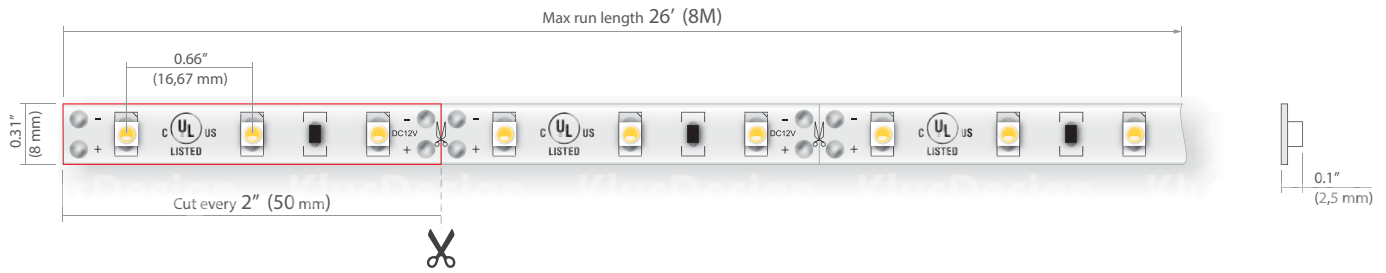


Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
K-27-1210	2700K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	340 L/M 106 L/F	90+	Epistar 3528	140°	12V
K-30-1210	3000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	360 L/M 112 L/F	90+	Epistar 3528	140°	12V
K-35-1210	3500K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	390 L/M 121 L/F	90+	Epistar 3528	140°	12V
K-40-1210	4000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	420 L/M 140 L/F	90+	Epistar 3528	140°	12V

* other colors available upon request

4.8 Watt / M, 24 V

Flexible LED strips

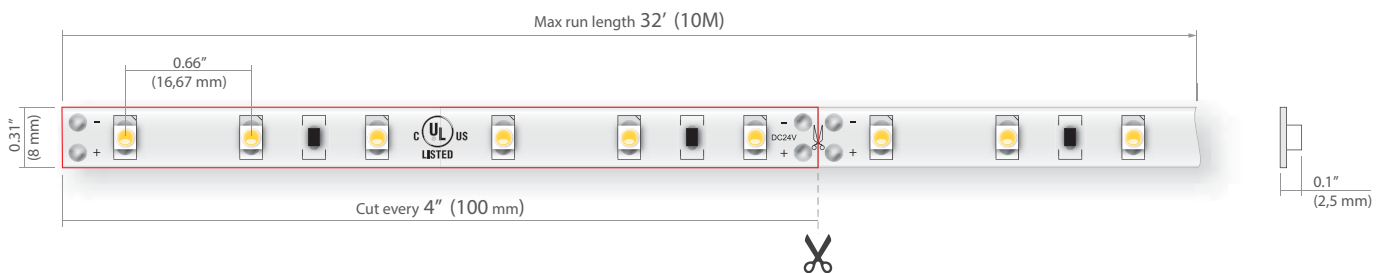


Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
K-27-1210-24V	2700K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	340 L/M 106 L/F	90+	Epistar 3528	140°	24V
K-30-1210-24V	3000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	360 L/M 112 L/F	90+	Epistar 3528	140°	24V
K-35-1210-24V	3500K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	390 L/M 121 L/F	90+	Epistar 3528	140°	24V
K-40-1210-24V	4000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	420 L/M 140 L/F	90+	Epistar 3528	140°	24V

* other colors available upon request

4.8 Watt / M, 12 V

Side emitting LED

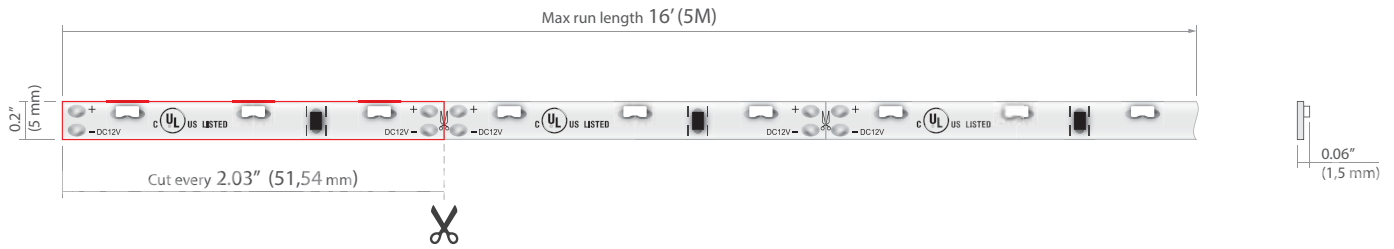

Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
K-SE-30-1210	3000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	320 L/M 100 L/F	90+	Epistar 4008	130°	12V

* other colors available upon request




LED strip K-SE-30-1210 is dedicated for the STEKO extrusion. It utilizes side emitting diodes and the strip itself is just 5 mm wide.

Delicate illumination of stairs provides safety for its users.

9.6 Watt / M, 12V

Flexible LED strips

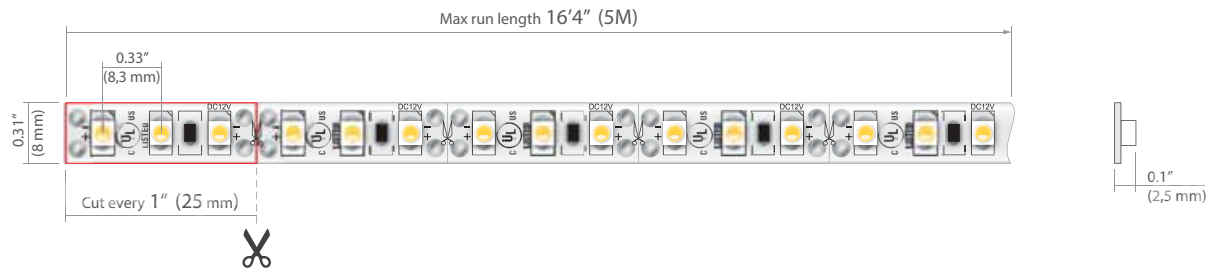


Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
K-27-1220	2700K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	720 L/M 225 L/F	90+	Epistar 3528	140°	12V
K-30-1220	3000K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	850 L/M 265 L/F	90+	Epistar 3528	140°	12V
K-35-1220	3500K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	910 L/M 284 L/F	90+	Epistar 3528	140°	12V
K-40-1220	4000K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	960 L/M 300 L/F	90+	Epistar 3528	140°	12V

* other colors available upon request

9.6 Watt / M, 24V

Flexible LED strips

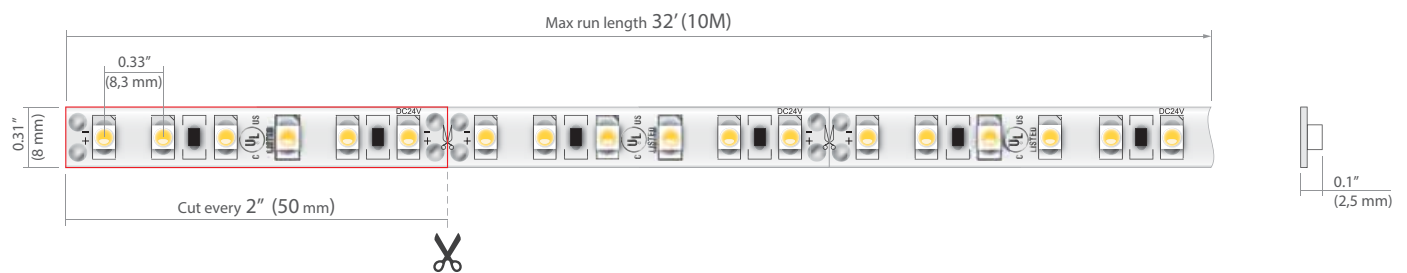


Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
K-27-1220-24V	2700K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	720 L/M 225 L/F	90+	Epistar 3528	140°	24V
K-30-1220-24V	3000K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	850 L/M 265 L/F	90+	Epistar 3528	140°	24V
K-35-1220-24V	3500K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	910 L/M 284 L/F	90+	Epistar 3528	140°	24V
K-40-1220-24V	4000K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	960 L/M 300 L/F	90+	Epistar 3528	140°	24V

* other colors available upon request

14.4 Watt / M, 12 V

Flexible LED strips

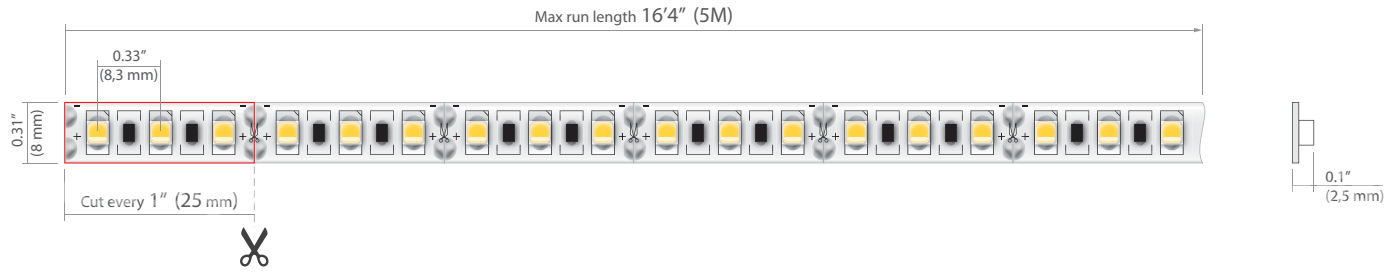


Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
K-27-1275	2700K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1200 L/M 375 L/F	90+	Epistar 2835	120°	12V
K-30-1275	3000K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1200 L/M 375 L/F	90+	Epistar 2835	120°	12V
K-35-1275	3500K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1320 L/M 412 L/F	90+	Epistar 2835	120°	12V
K-40-1275	4000K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1440 L/M 450 L/F	90+	Epistar 2835	120°	12V

* other colors available upon request


14.4 Watt / M, 24 V

Flexible LED strips

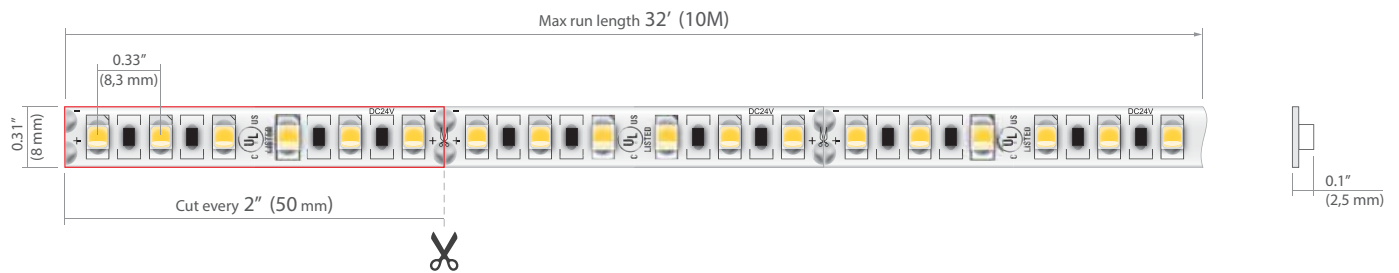

Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
K-27-1275-24V	2700K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1200 L/M 375 L/F	90+	Epistar 2835	120°	24V
K-30-1275-24V	3000K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1200 L/M 375 L/F	90+	Epistar 2835	120°	24V
K-35-1275-24V	3500K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1320 L/M 412 L/F	90+	Epistar 2835	120°	24V
K-40-1275-24V	4000K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1440 L/M 450 L/F	90+	Epistar 2835	120°	24V

* other colors available upon request

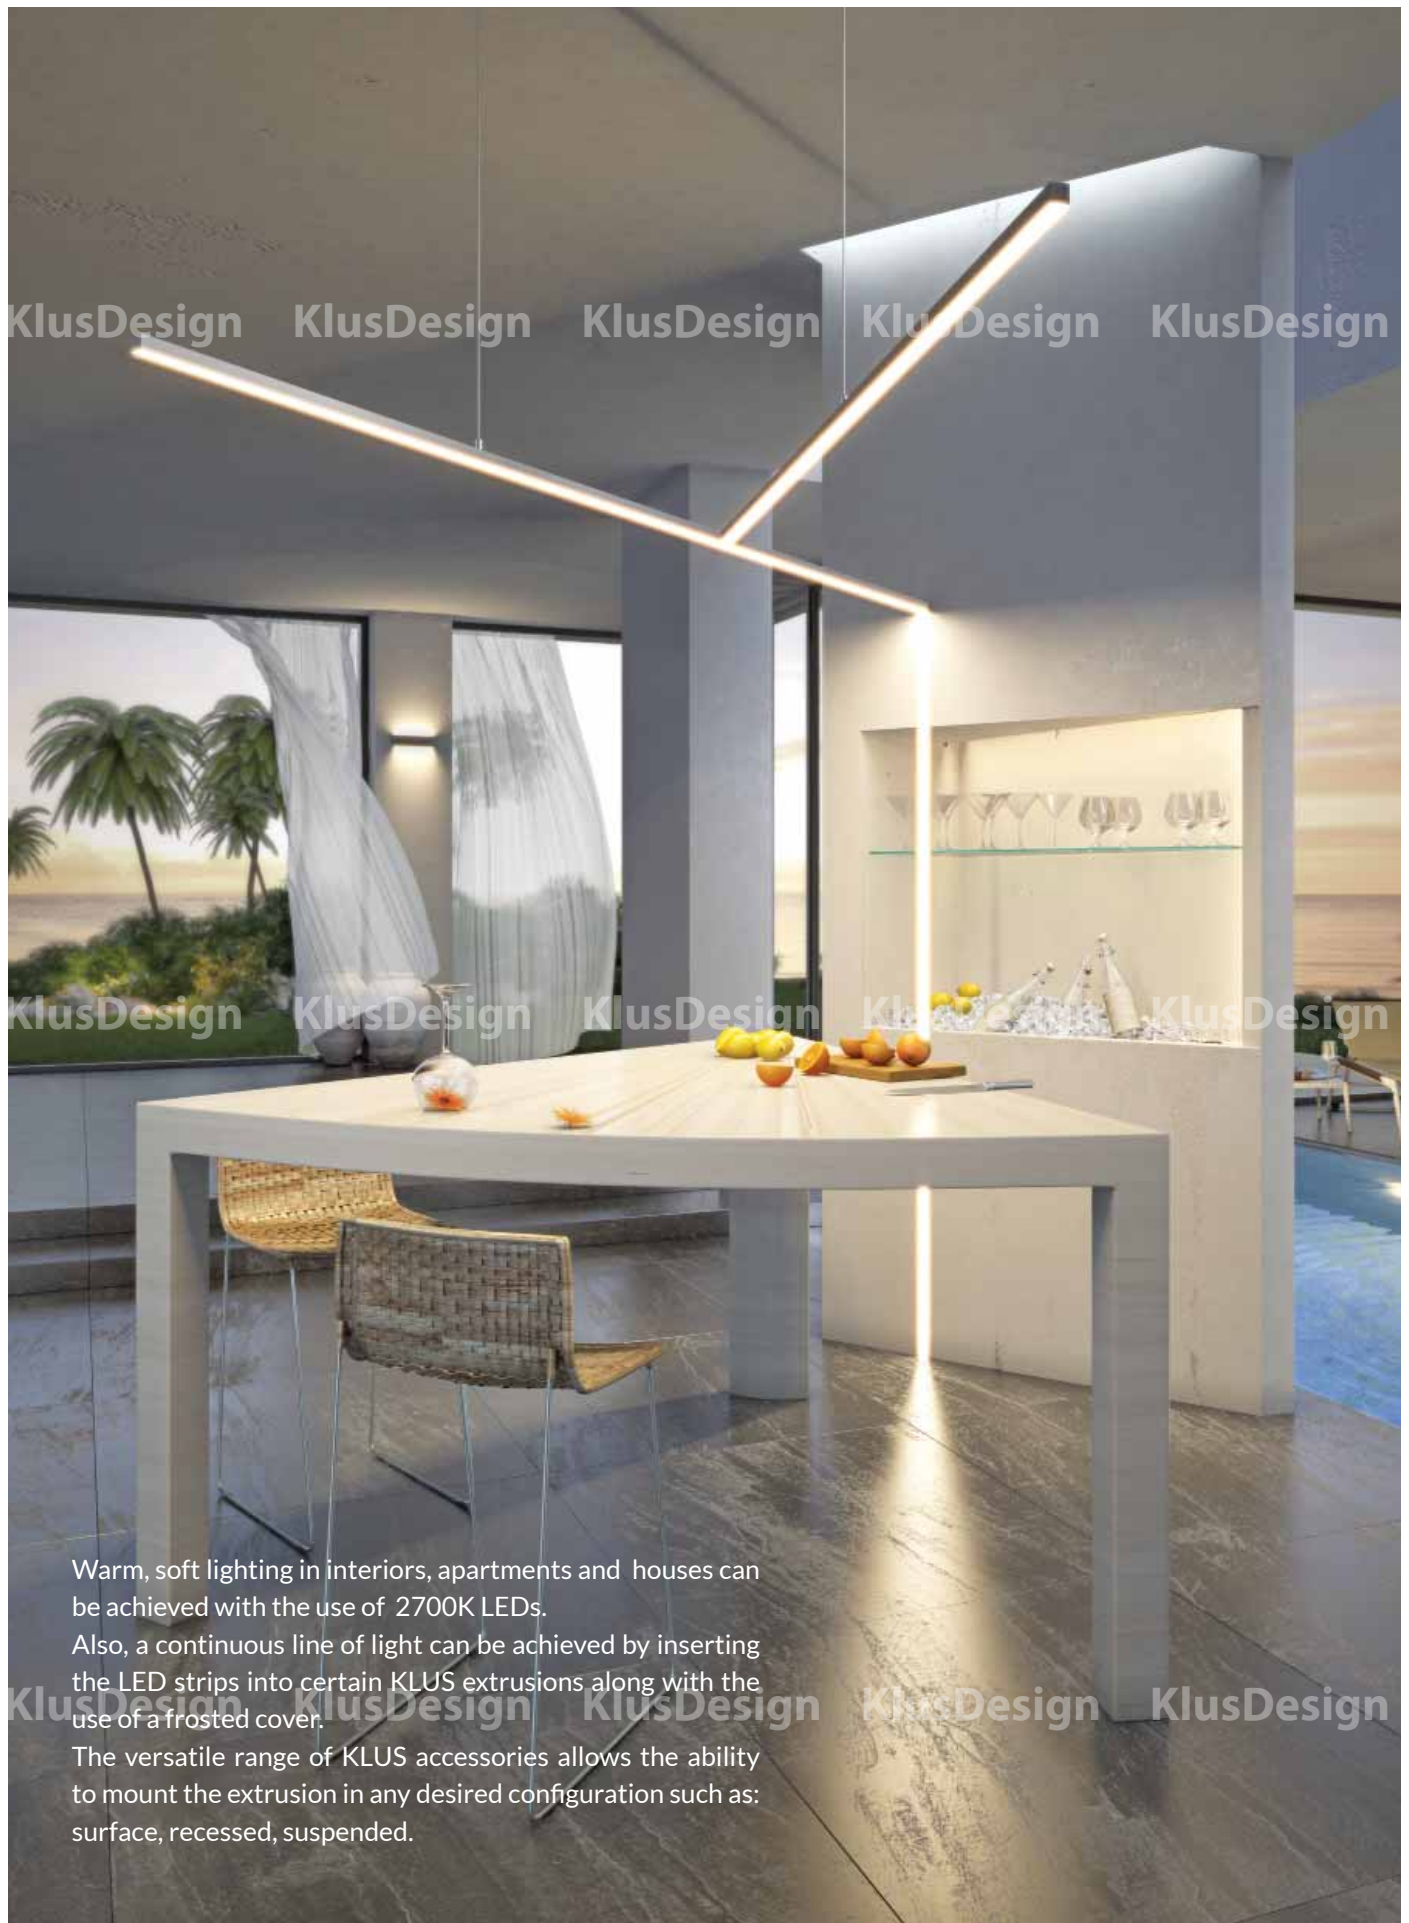


Warm, soft lighting in interiors, apartments and houses can be achieved with the use of 2700K LEDs.

Also, a continuous line of light can be achieved by inserting the LED strips into certain KLUS extrusions along with the use of a frosted cover.

The versatile range of KLUS accessories allows the ability to mount the extrusion in any desired configuration such as: surface, recessed, suspended.


18.2 Watt / M, 24 V

High density LED strips

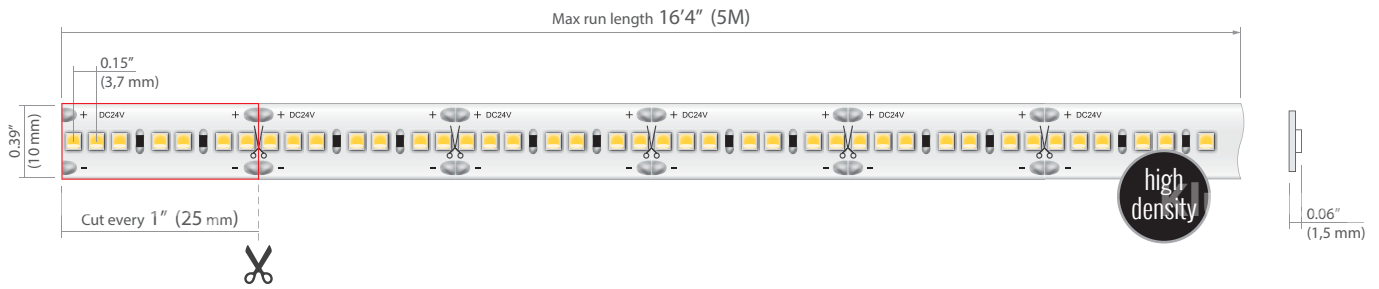

Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
K-27-1820-HD-24V	2700K	18.2 W/M 5.6 W/F	266 LEDs/M 81 LEDs/F	1470 L/M 448 L/F	90+	Epistar 2016	120°	24V
K-30-1820-HD-24V	3000K	18.2 W/M 5.6 W/F	266 LEDs/M 81 LEDs/F	1510 L/M 460 L/F	90+	Epistar 2016	120°	24V
K-35-1820-HD-24V	3500K	18.2 W/M 5.6 W/F	266 LEDs/M 81 LEDs/F	1590 L/M 484 L/F	90+	Epistar 2016	120°	24V
K-40-1820-HD-24V	4000K	18.2 W/M 5.6 W/F	266 LEDs/M 81 LEDs/F	1640 L/M 500 L/F	90+	Epistar 2016	120°	24V

* other colors available upon request

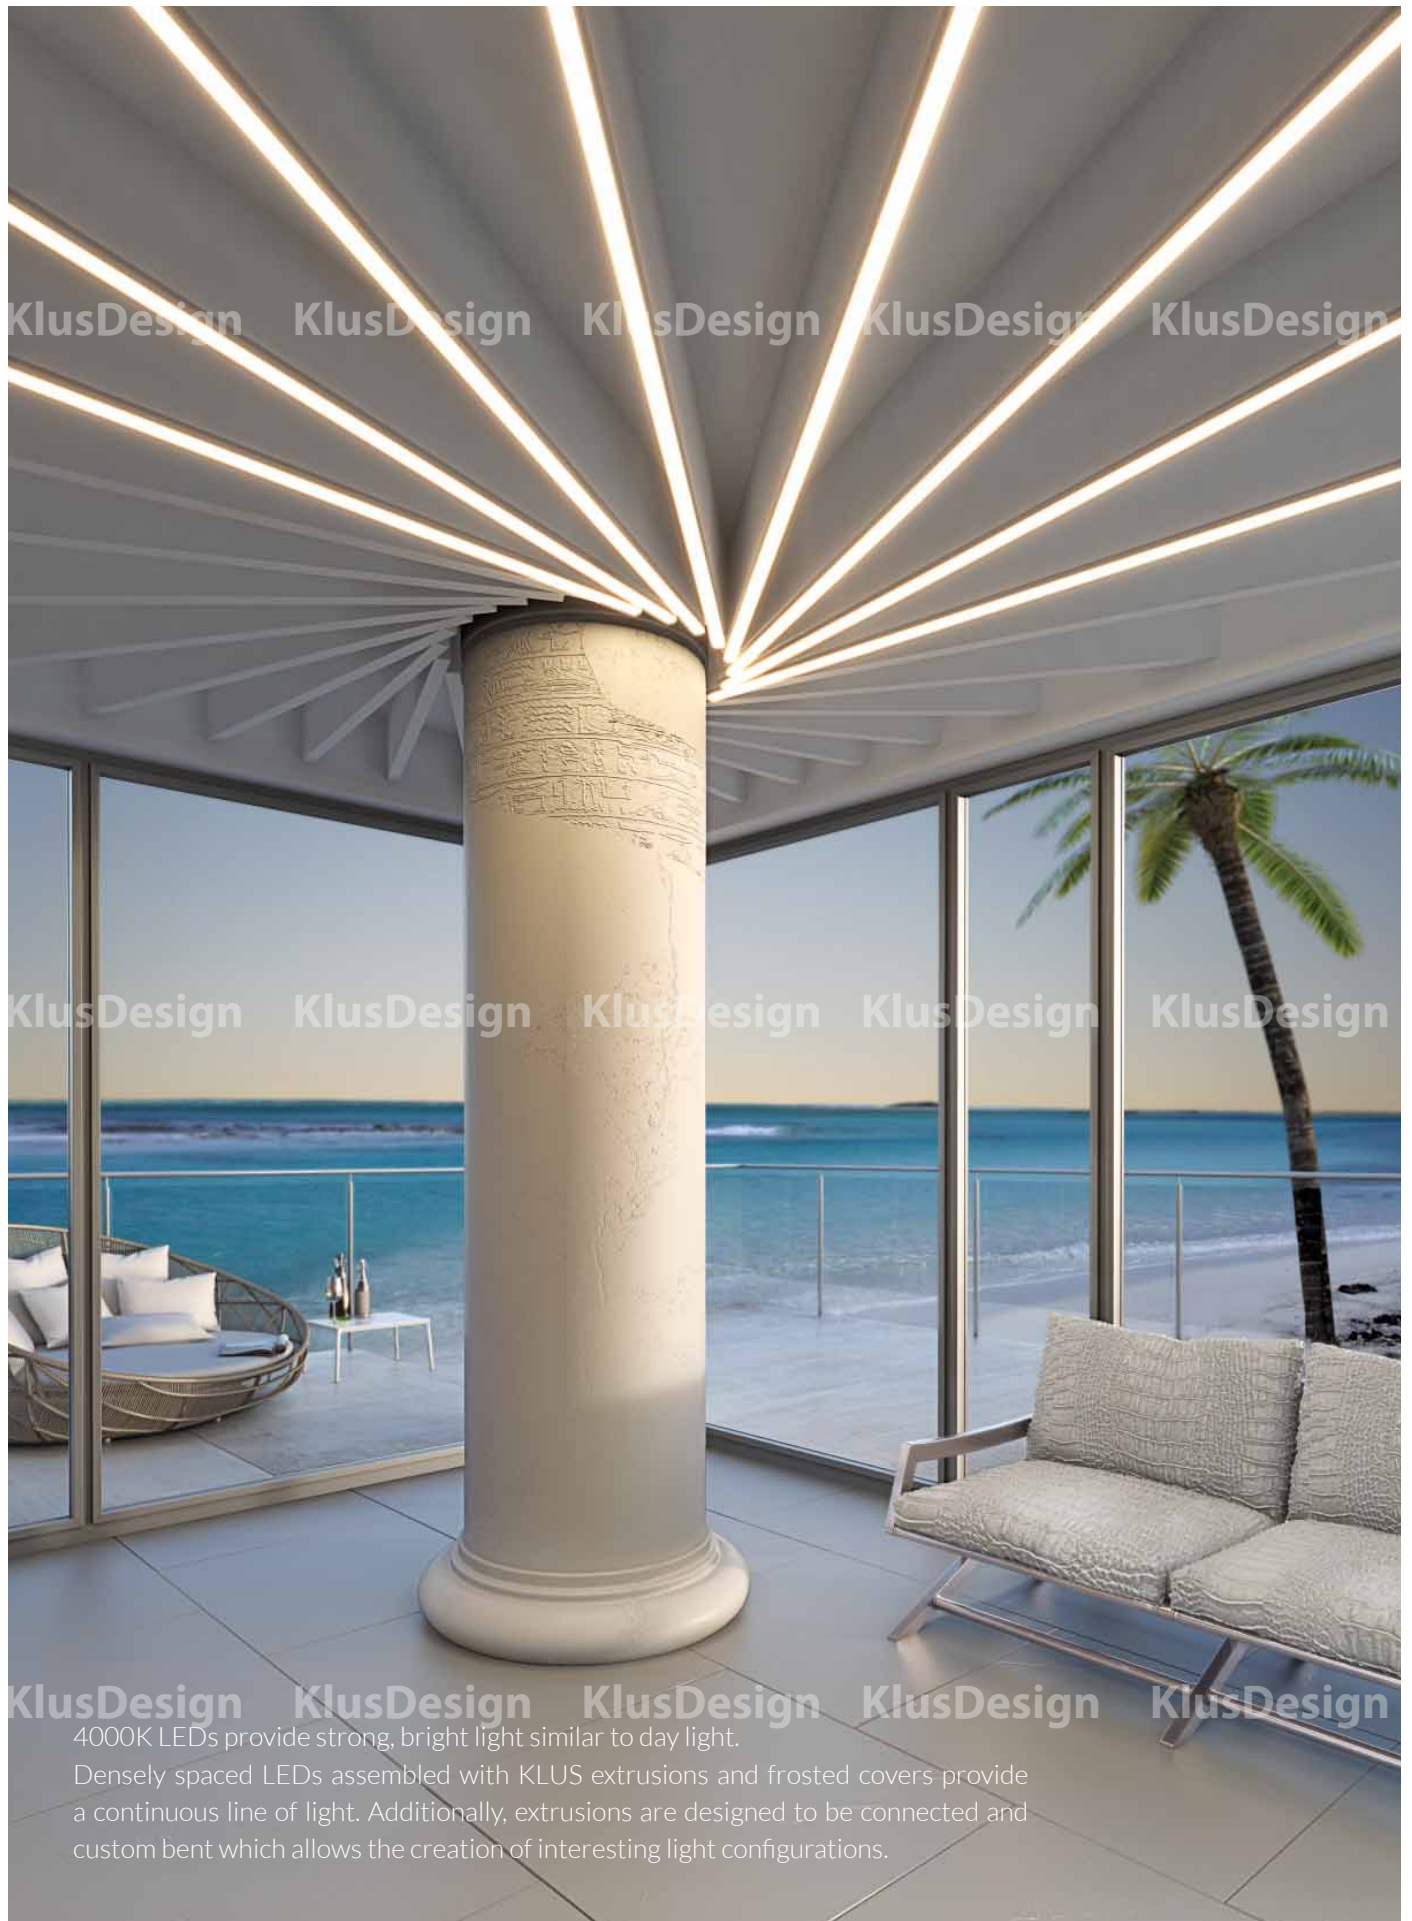

KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign

4000K LEDs provide strong, bright light similar to day light.

Densely spaced LEDs assembled with KLUS extrusions and frosted covers provide a continuous line of light. Additionally, extrusions are designed to be connected and custom bent which allows the creation of interesting light configurations.

4.8 Watt / M, 12 V, IP65

Flexible LED strips




Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-27-1210	2700K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	300 L/M 95 L/F	90+	Epistar 3528	140°	12V
WP-K-30-1210	3000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	320 L/M 100 L/F	90+	Epistar 3528	140°	12V
WP-K-35-1210	3500K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	345 L/M 105 L/F	90+	Epistar 3528	140°	12V
WP-K-40-1210	4000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	370 L/M 125 L/F	90+	Epistar 3528	140°	12V

* other colors available upon request

4.8 Watt / M, 24 V, IP65

Flexible LED strips

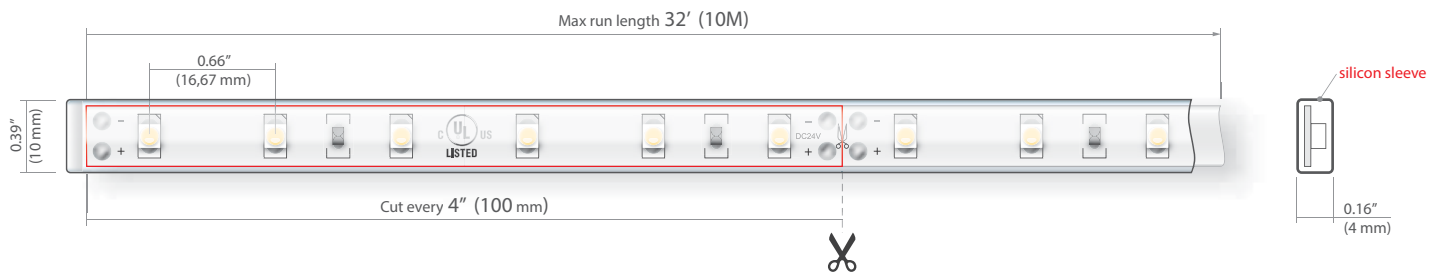


Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-27-1210-24V	2700K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	300 L/M 95 L/F	90+	Epistar 3528	140°	24V
WP-K-30-1210-24V	3000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	320 L/M 100 L/F	90+	Epistar 3528	140°	24V
WP-K-35-1210-24V	3500K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	345 L/M 105 L/F	90+	Epistar 3528	140°	24V
WP-K-40-1210-24V	4000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	370 L/M 125 L/F	90+	Epistar 3528	140°	24V

* other colors available upon request

4.8 Watt / M, 12 V, IP65

Gel coated, side emitting LED

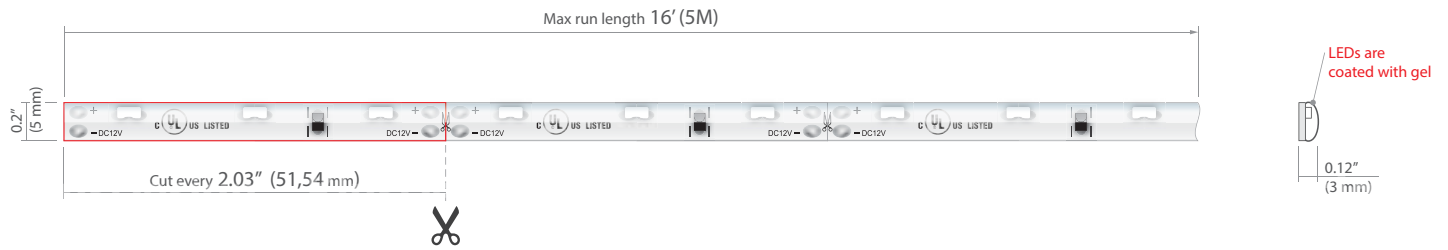


Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-SE-30-1210	3000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	320 L/M 100 L/F	90+	Epistar 4008	130°	12V

* other colors available upon request



9.6 Watt / M, 12 V, IP65

Flexible LED strips

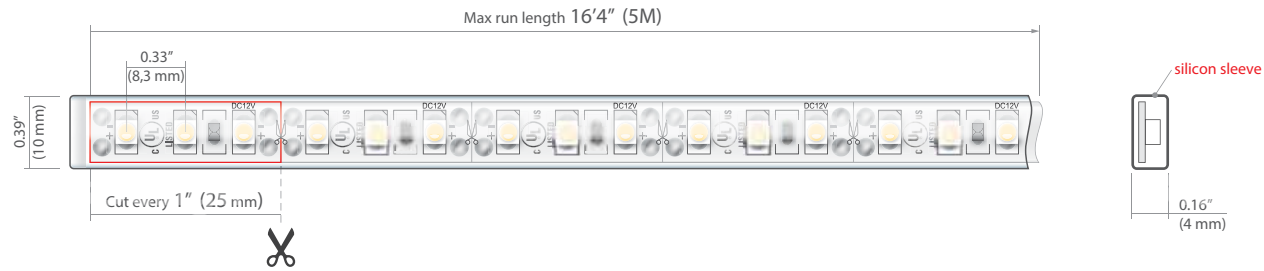


Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-27-1220	2700K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	635 L/M 200 L/F	90+	Epistar 3528	140°	12V
WP-K-30-1220	3000K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	750 L/M 230 L/F	90+	Epistar 3528	140°	12V
WP-K-35-1220	3500K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	800 L/M 250 L/F	90+	Epistar 3528	140°	12V
WP-K-40-1220	4000K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	845 L/M 265 L/F	90+	Epistar 3528	140°	12V

* other colors available upon request

9.6 Watt / M, 24 V, IP65

Flexible LED strips

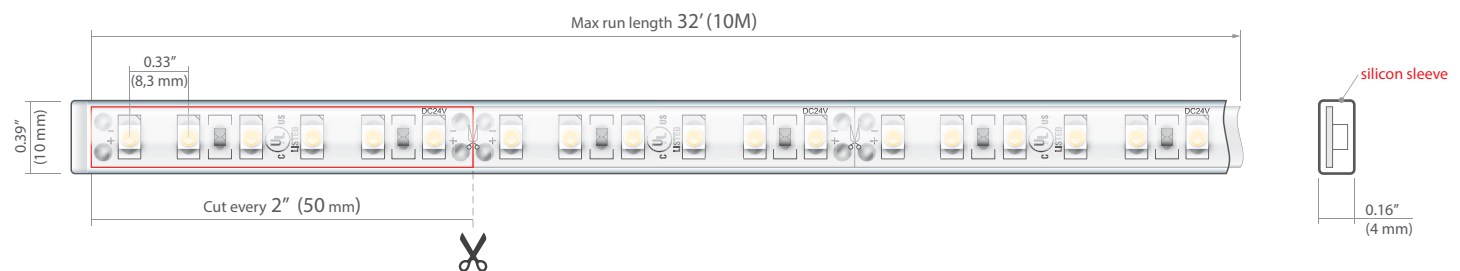


Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-27-1220-24V	2700K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	635 L/M 200 L/F	90+	Epistar 3528	140°	24V
WP-K-30-1220-24V	3000K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	750 L/M 230 L/F	90+	Epistar 3528	140°	24V
WP-K-35-1220-24V	3500K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	800 L/M 250 L/F	90+	Epistar 3528	140°	24V
WP-K-40-1220-24V	4000K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	845 L/M 265 L/F	90+	Epistar 3528	140°	24V

* other colors available upon request

9.6 Watt / M, 12 V, IP65

Gel coated LED dedicated to fit HR-ALU extrusion

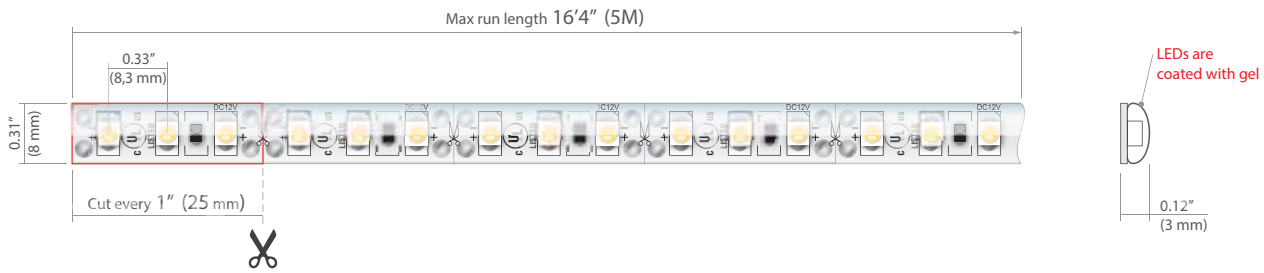

Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-35-1220-IP65	3500K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	910 L/M 284 L/F	90+	Epistar 3825	140°	12V

* other colors available upon request

9.6 Watt / M, 24 V, IP65

Gel coated LED dedicated to fit HR-ALU extrusion




Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-35-1220-IP65-24V	3500K	9.6 W/M 3 W/F	120 LEDs/M 38 LEDs/F	910 L/M 284 L/F	90+	Epistar	100°	24V

* other colors available upon request

14.4 Watt / M, 12 V, IP65

Flexible LED strips

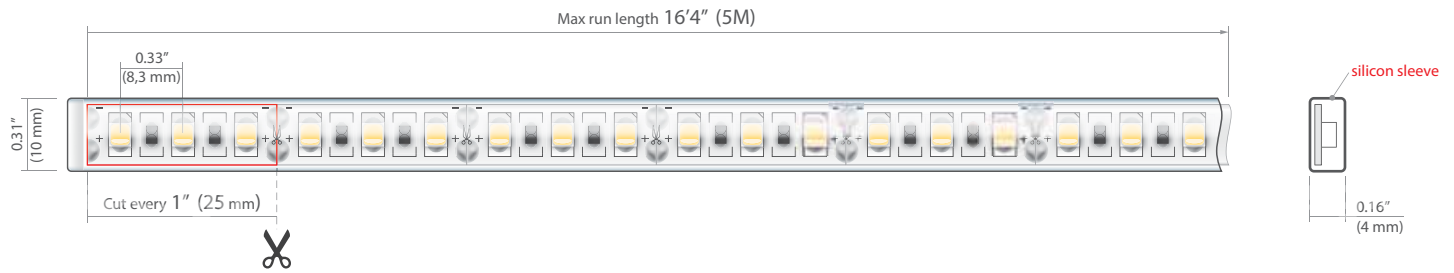


Product code No.	Color Temp. *	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-27-1275	2700K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1055 L/M 330 L/F	90+	Epistar 2835	120°	12V
WP-K-30-1275	3000K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1055 L/M 330 L/F	90+	Epistar 2835	120°	12V
WP-K-35-1275	3500K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1160 L/M 360 L/F	90+	Epistar 2835	120°	12V
WP-K-40-1275	4000K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1270 L/M 400 L/F	90+	Epistar 2835	120°	12V

* other colors available upon request

14.4 Watt / M, 24 V, IP65

Flexible LED strips

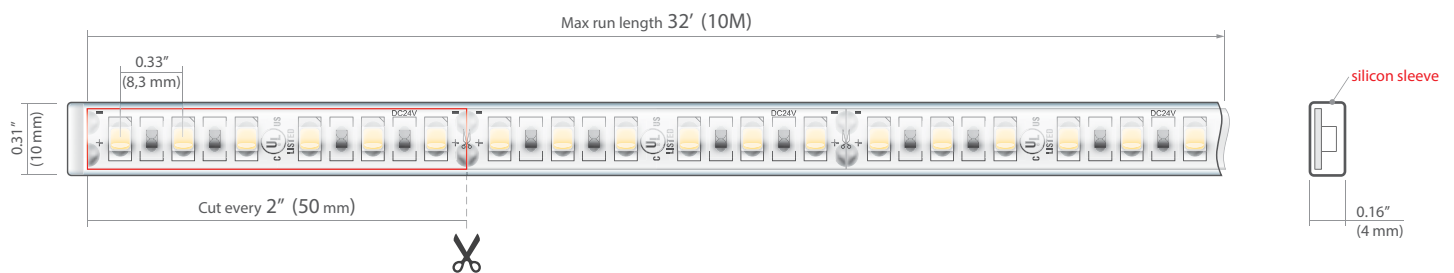


Product code No.	Color Temp. *	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-27-1275-24V	2700K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1055 L/M 330 L/F	90+	Epistar 2835	120°	24V
WP-K-30-1275-24V	3000K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1055 L/M 330 L/F	90+	Epistar 2835	120°	24V
WP-K-35-1275-24V	3500K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1160 L/M 360 L/F	90+	Epistar 2835	120°	24V
WP-K-40-1275-24V	4000K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1270 L/M 400 L/F	90+	Epistar 2835	120°	24V

* other colors available upon request

18.2 Watt / M, 24 V, IP65

High density LED strips

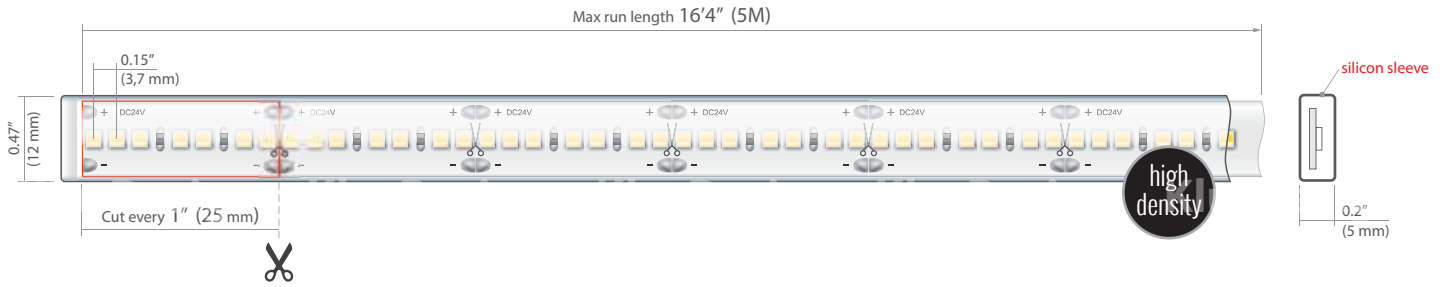


Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-27-1820-HD-24V	2700K	18.2 W/M 5.6 W/F	266 LEDs/M 81 LEDs/F	1294 L/M 394 L/F	90+	Epistar 2016	120°	24V
WP-K-30-1820-HD-24V	3000K	18.2 W/M 5.6 W/F	266 LEDs/M 81 LEDs/F	1329 L/M 405 L/F	90+	Epistar 2016	120°	24V
WP-K-35-1820-HD-24V	3500K	18.2 W/M 5.6 W/F	266 LEDs/M 81 LEDs/F	1400 L/M 426 L/F	90+	Epistar 2016	120°	24V
WP-K-40-1820-HD-24V	4000K	18.2 W/M 5.6 W/F	266 LEDs/M 81 LEDs/F	1444 L/M 440 L/F	90+	Epistar 2016	120°	24V

* other colors available upon request

18.2 Watt / M, 24 V, IP65

Gel coated high density LED strip

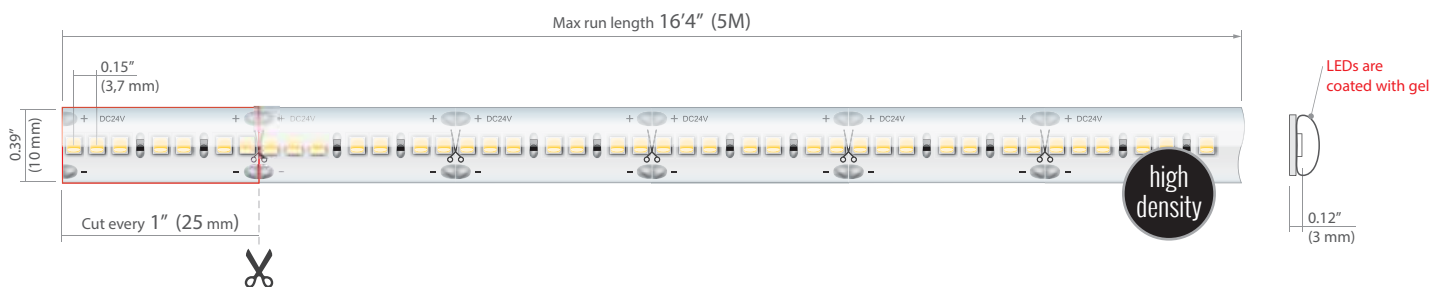


Product code No.	Color Temp.*	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-35-1820-HD-IP65-24V	3500K	18.2 W/M 5.6 W/F	266 LEDs/M 81 LEDs/F	1400 L/M 426 L/F	90+	Epistar 2016	120°	24V

* other colors available upon request

IP 65 LEDs are ideal for light or illuminating interiors with high humidity. KLUS offers extrusions that are dedicated for sealing as well as dedicated for mounting between tiles.

KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign

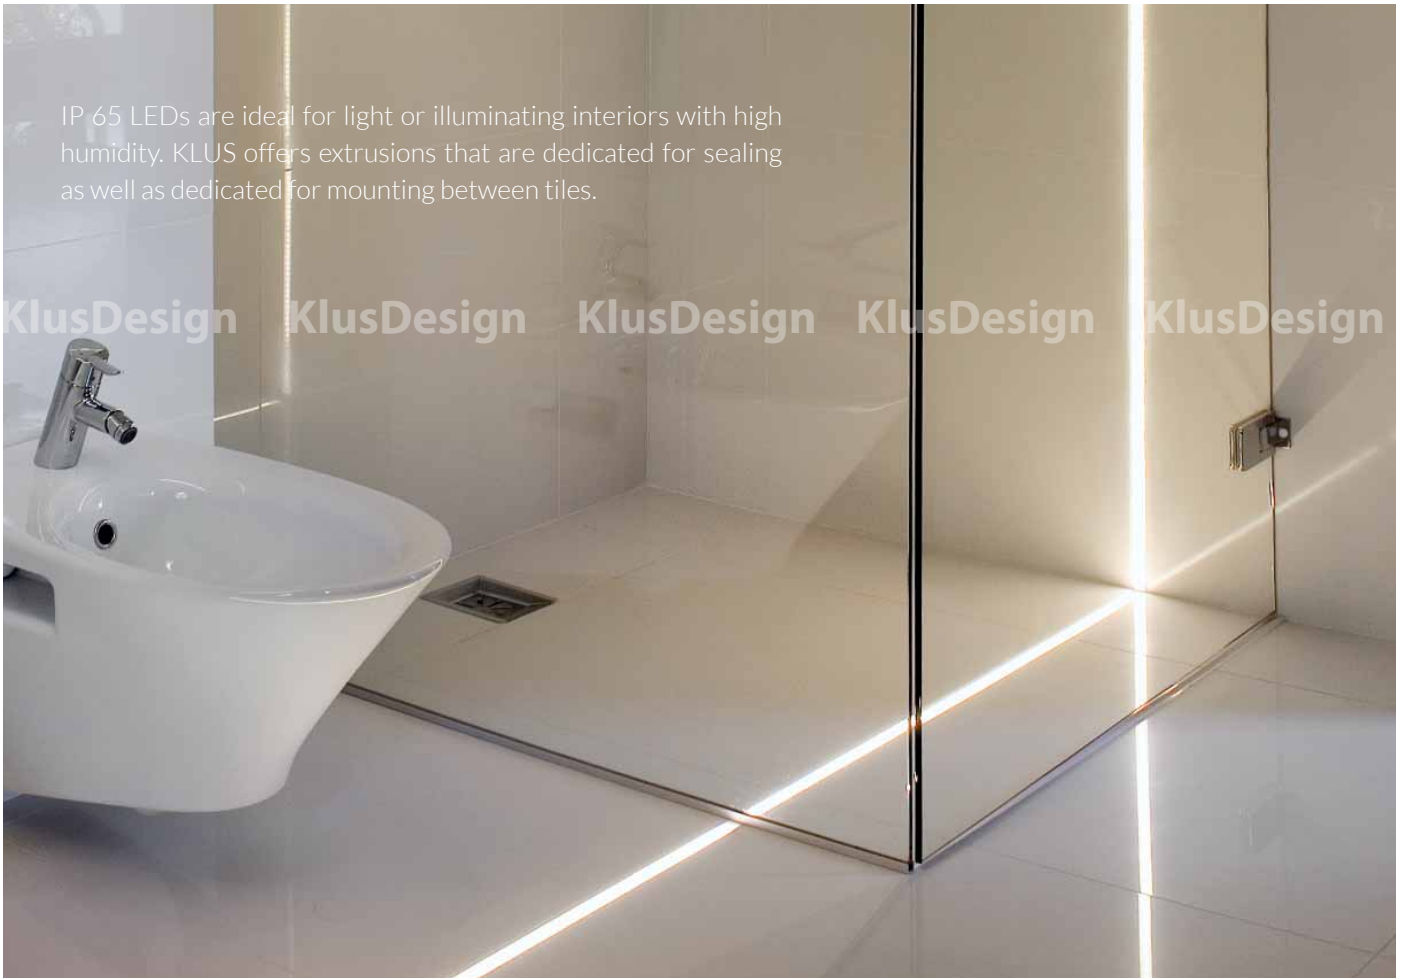


KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign

Waterproof LEDs find their application outdoors and can be exposed to various weather conditions such as: rain, snow, cold. After inserting IP 65 LEDs into KLUS extrusions the whole fixture needs to be additionally sealed. Such waterproof fixtures can be securely and strongly mounted to the surface thanks to various accessories offered by KLUS.




KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign

RGB FLEXIBLE LED STRIPS

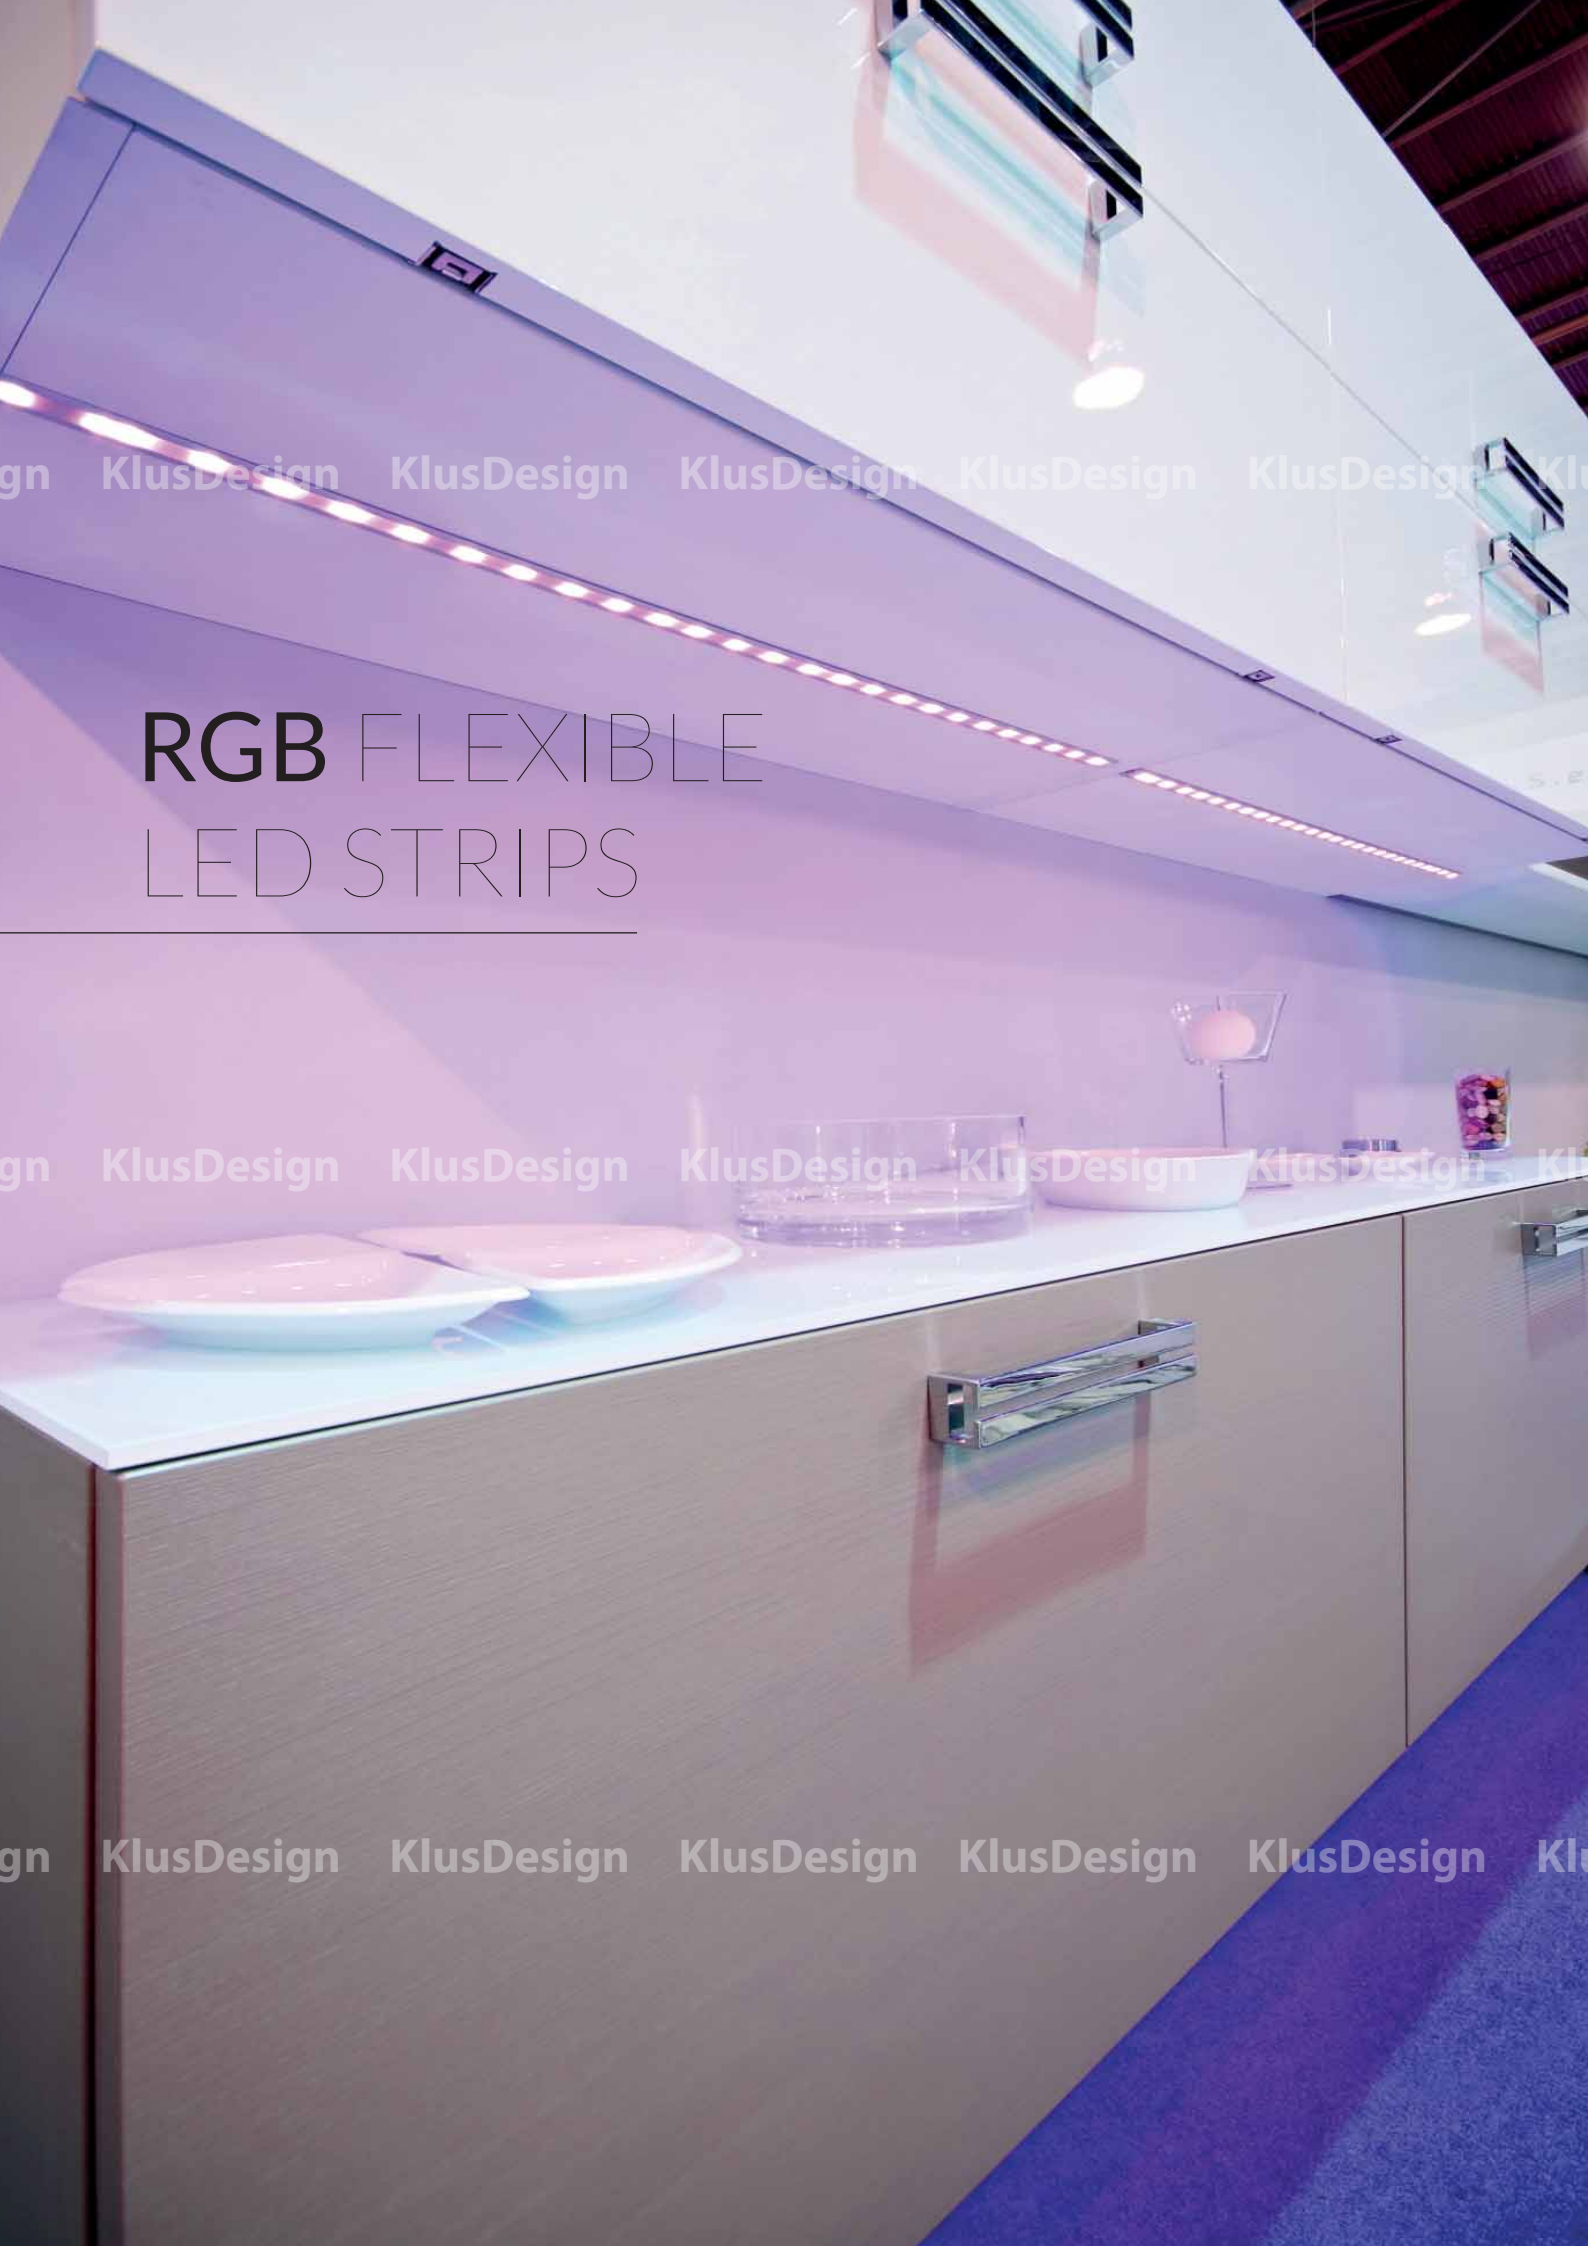

14.4 Watt / M, 12 V


RGB flexible LED strips

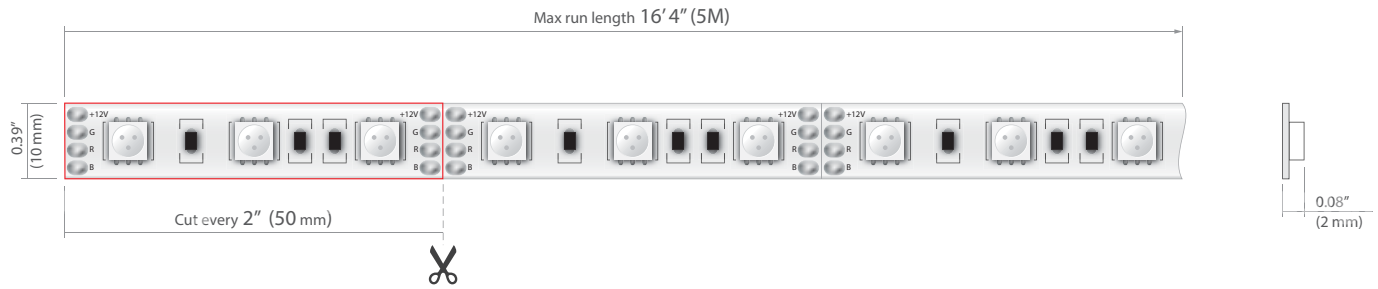

Product code No.	Color Temp.	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
K-1275-RGB	Red	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	40 L/M 12,5 L/F	+	Epistar 5050		12V
	Green	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	173 L/M 54 L/F	+	Epistar 5050		12V
	Blue	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	30 L/M 9,3 L/F	+	Epistar 5050		12V
	R G B	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	243 L/M 75 L/F *All LEDs at 100%	+	Epistar 5050	100°	12V

14.4 Watt / M, 24 V

RGB flexible LED strips

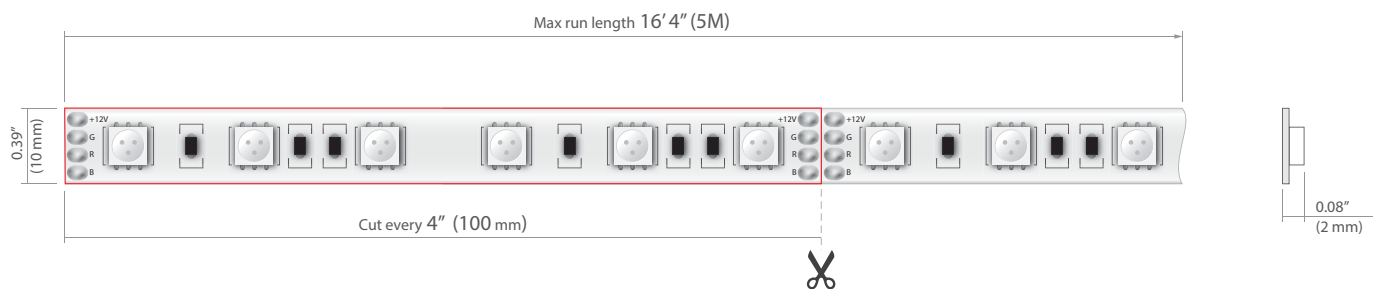

Product code No.	Color Temp.	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
K-1275-RGB-24V	Red	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	40 L/M 12,5 L/F	+	Epistar 5050		24V
	Green	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	173 L/M 54 L/F	+	Epistar 5050		24V
	Blue	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	30 L/M 9,3 L/F	+	Epistar 5050		24V
	R G B	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	243 L/M 75 L/F *All LEDs at 100%	+	Epistar 5050	100°	24V

WATERPROOF

RGB FLEXIBLE
LED STRIPS

gn KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign Kl


gn KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign Kl

gn KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign Kl



14.4 Watt / M, 12 V, IP65


RGB flexible LED strips

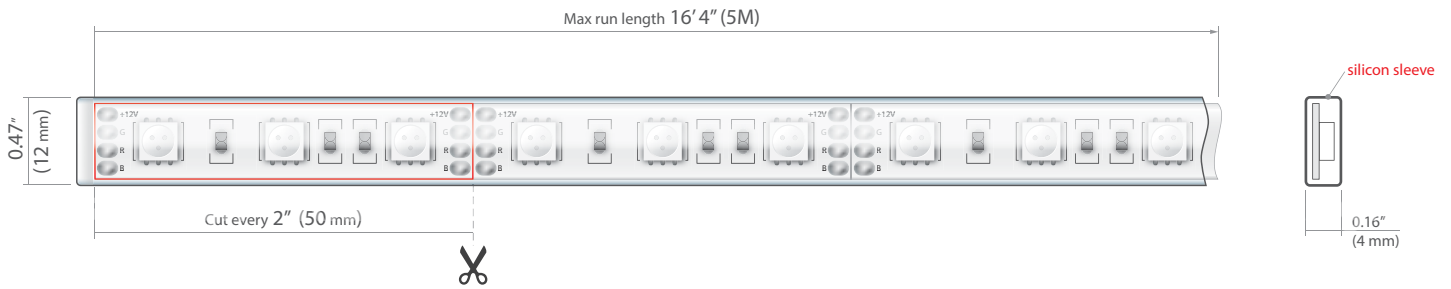

Product code No.	Color Temp.	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-1275-RGB	Red	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	40 L/M 12,5 L/F	+	Epistar 5050	100°	12V
	Green	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	173 L/M 54 L/F	+	Epistar 5050	100°	12V
	Blue	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	30 L/M 9,3 L/F	+	Epistar 5050	100°	12V
	R G B	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	243 L/M 75 L/F *All LEDs at 100%	+	Epistar 5050	100°	12V

14.4 Watt / M, 24 V, IP65

RGB flexible LED strips

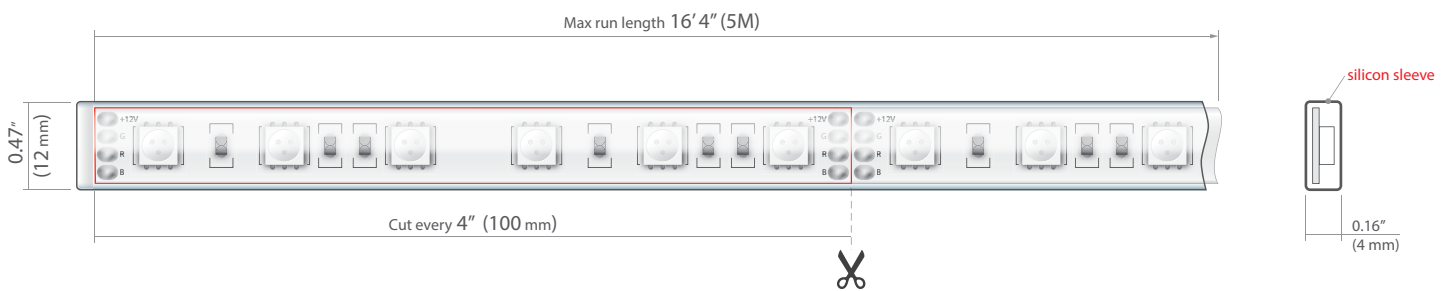


Product code No.	Color Temp.	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-1275-RGB-24V	Red	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	40 L/M 12,5 L/F	+	Epistar 5050	100°	24V
	Green	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	173 L/M 54 L/F	+	Epistar 5050	100°	24V
	Blue	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	30 L/M 9,3 L/F	+	Epistar 5050	100°	24V
	R G B	14.4 W/M 4.5 W/F	60 LEDs/M 18 LEDs/F	243 L/M 75 L/F *All LEDs at 100%	+	Epistar 5050	100°	24V

CONNECTION WIRES



- 4119** Connection Wire (18 Gauge)
- 4120** Connection Wire (22 Gauge)
- 4121** Grey Connection Wire (20 Gauge)
- 4118** Outdoor (18 Gauge)
- 4122** RGB Wire

exemplary scheme

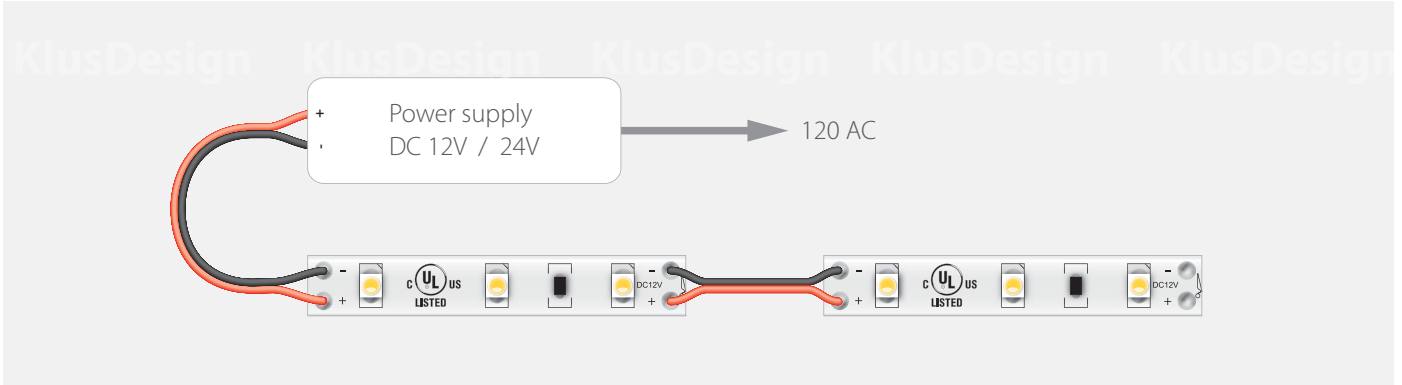

LED STRIP CONNECTORS WITHOUT SOLDERING



- C1-0W** Strip to Strip connector, white,
W: 10.5mm x H: 4.5mm x L: 16mm




- C2-1.5W**
1.5" (4cm) jumper extension wire connector, white,
W: 10.5mm x H: 4.5mm x L: 16mm



- C3-6W**
White connector with 6" (15.25cm) wire,
W: 10.5mm x H: 4.5mm x L: 16mm

exemplary scheme

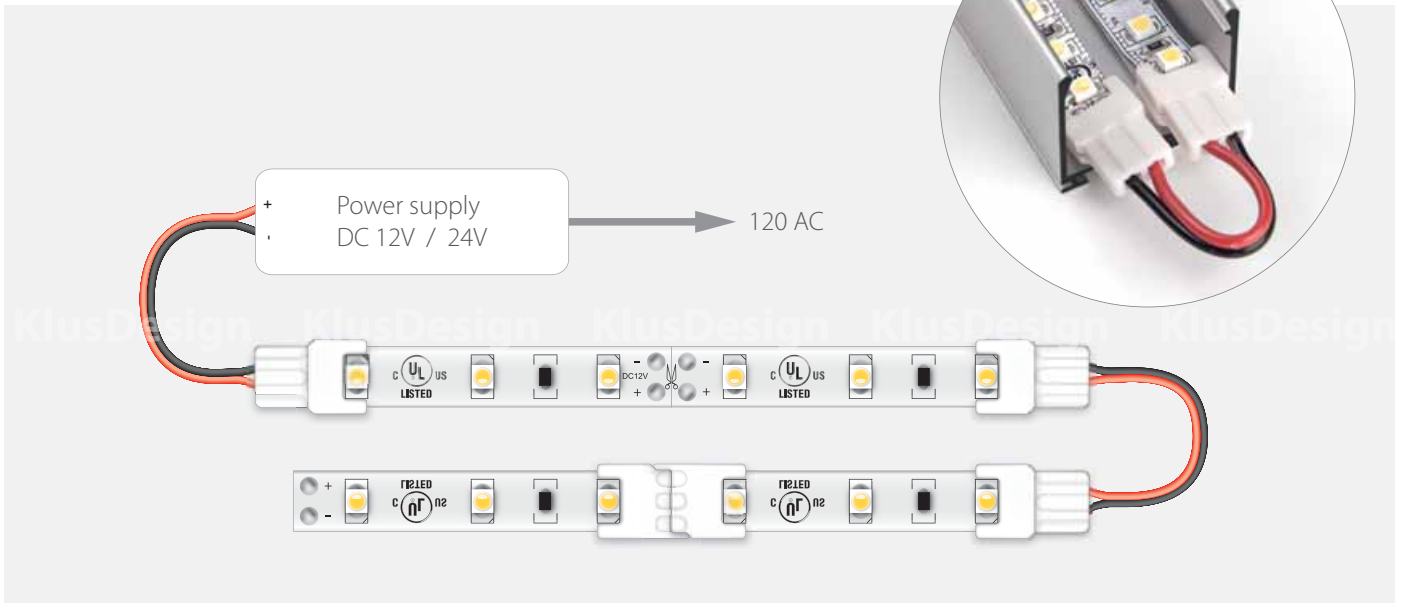

NON-WATERPROOF CONNECTORS



- FC-DC-15** UL, Female, DC, non-waterproof 6" connector
- FC-DC-92** UL, Female, DC, non-waterproof 36" connector
- FC-DC-183** UL, Female, DC, non-waterproof 72" connector




- MC-DC-15** UL, Male, DC, non-waterproof 6" connector
- MC-DC-92** UL, Male, DC, non-waterproof 36" connector
- MC-DC-183** UL, Male, DC, non-waterproof 72" connector



- 2M-1F-S** Black splitter cables with 2 male / 1 female ends
- UL2464 22AWG
- L=300mm / 200mm

exemplary scheme

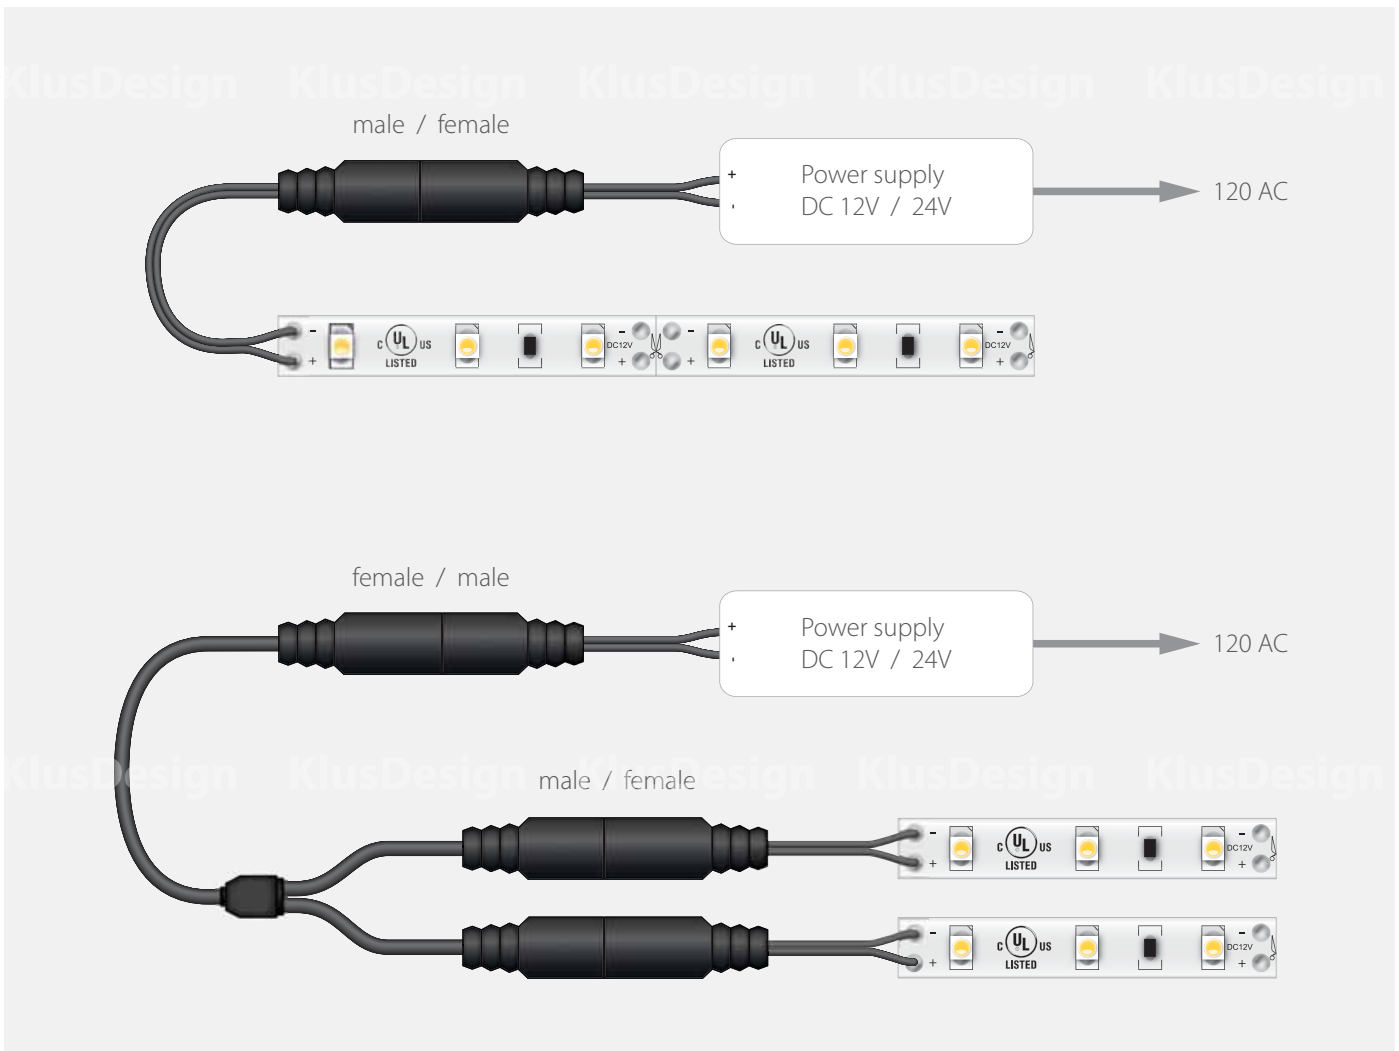

WATERPROOF CONNECTORS




- WP-FC-DC-15** UL, Female, Waterproof, 6" connector
- WP-FC-DC-92** UL, Female, Waterproof, 36" connector
- WP-FC-DC-183** UL, Female, Waterproof, 72" connector



- MP-FC-DC-15** UL, Male, Waterproof, 6" connector
- MP-FC-DC-92** UL, Male, Waterproof, 36" connector
- MP-FC-DC-183** UL, Male, Waterproof, 72" connector

exemplary scheme

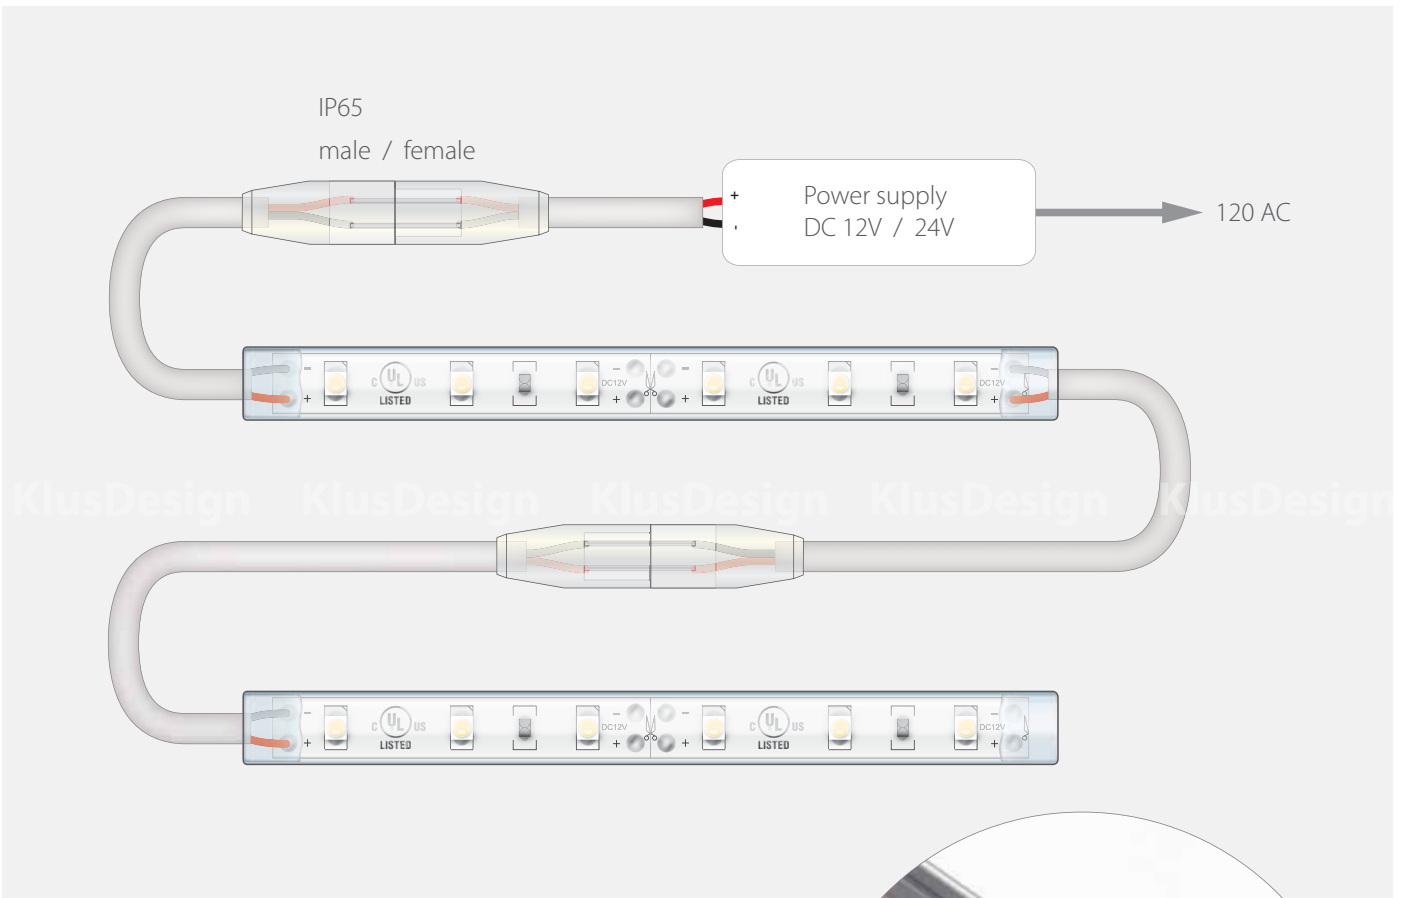


DIMMER




DIM 01 In line dimmer

exemplary scheme

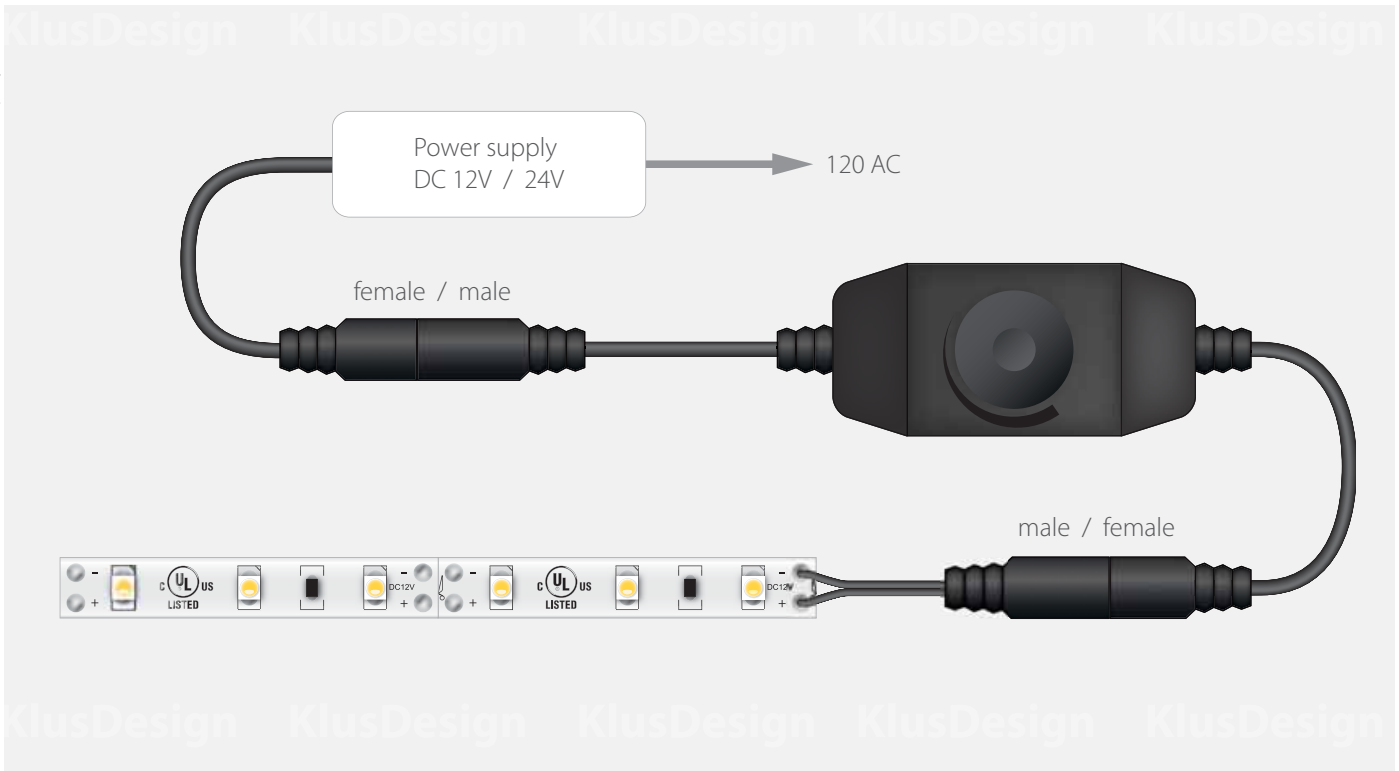


RGB SCHEME


exemplary scheme

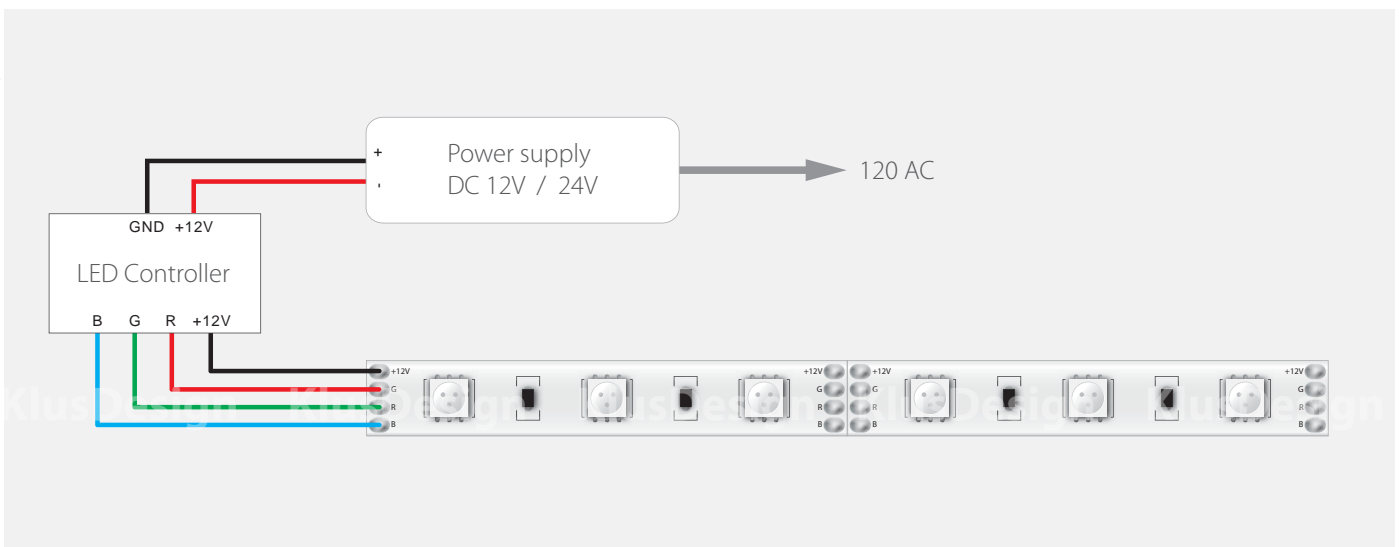

EXAMPLES OF LAMPS CONSTRUCTED OF KLUS LED STRIPS, EXTRUSIONS AND ACCESSORIES

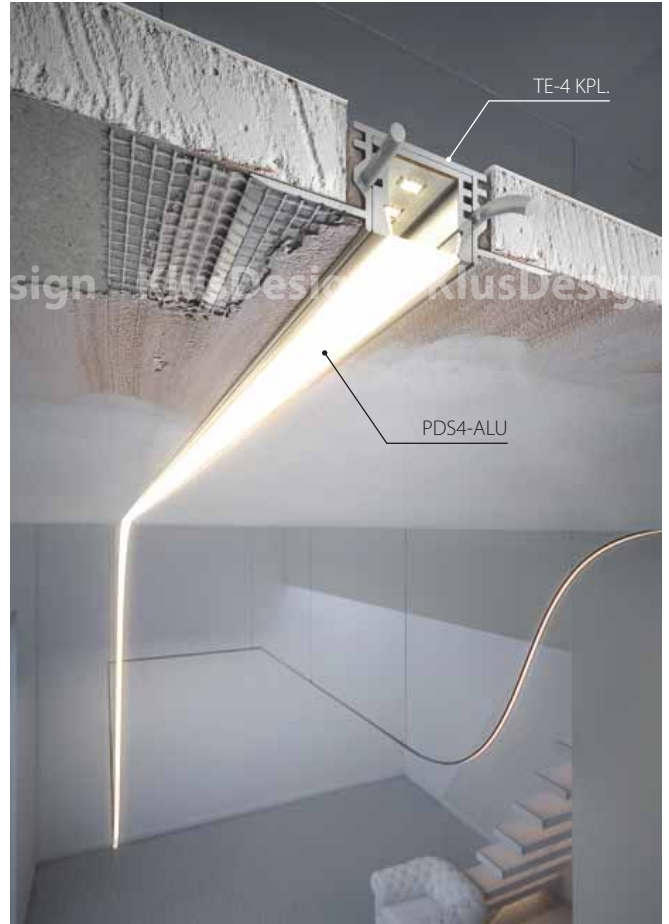









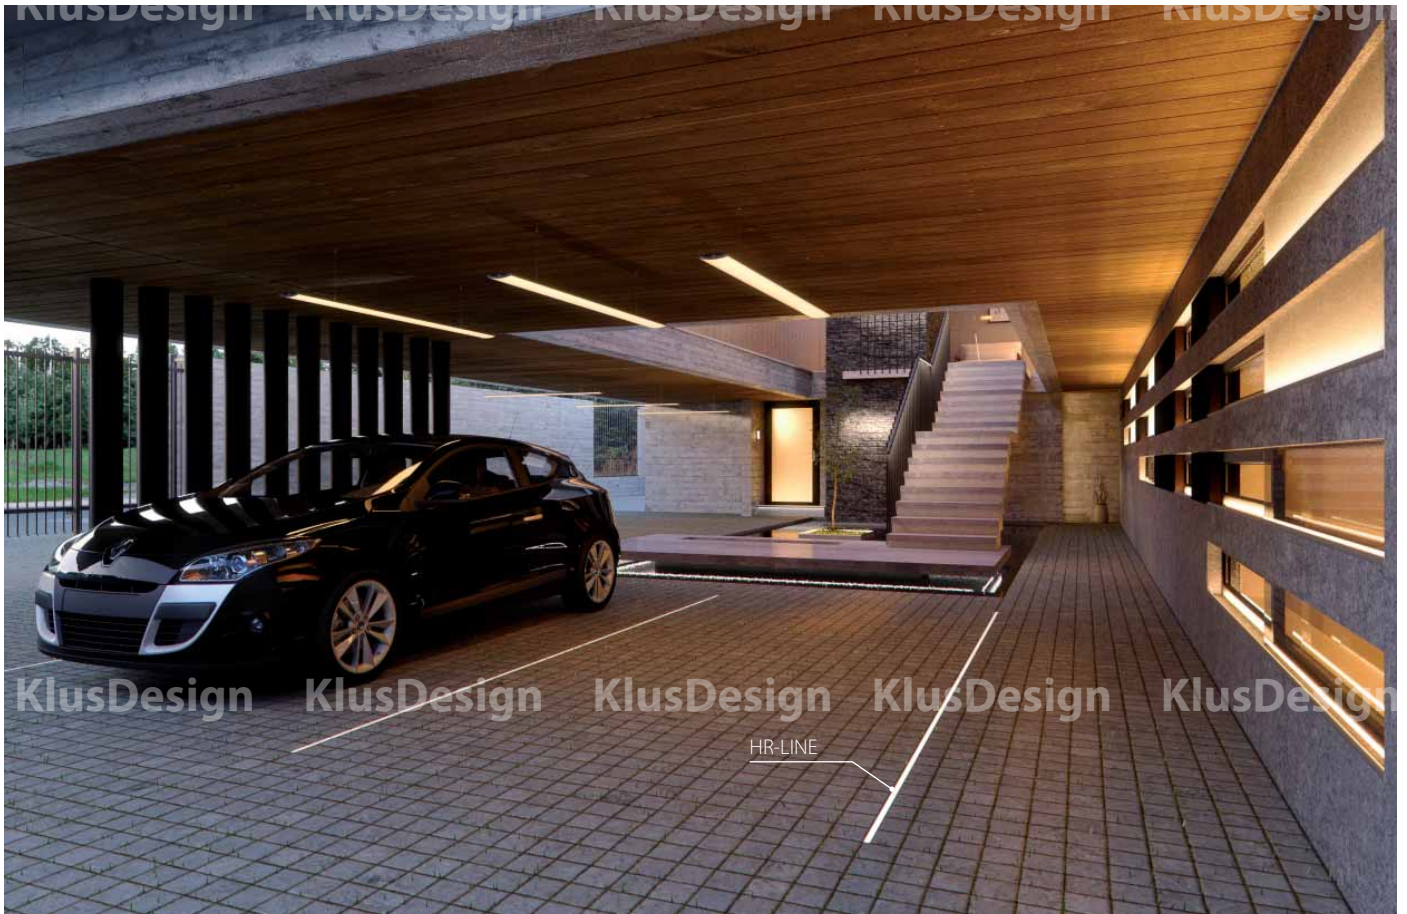

MOUNTING INSTRUCTIONS

Important safety instructions

1. Always test LED Strip before installation. If any part is damaged the product should not be used.
2. Prior to installation ensure power is off at fuse box to prevent electrical shock.
3. Be sure to check for correct electrical polarity.
4. Ensure that the power supply is capable of handling the total load; failure to do so may cause damage to the LEDs and/or the driver.
5. We assume no liability for damages resulting from improper assembly.
6. If you are uncertain of assembly, please contact a qualified electrician.

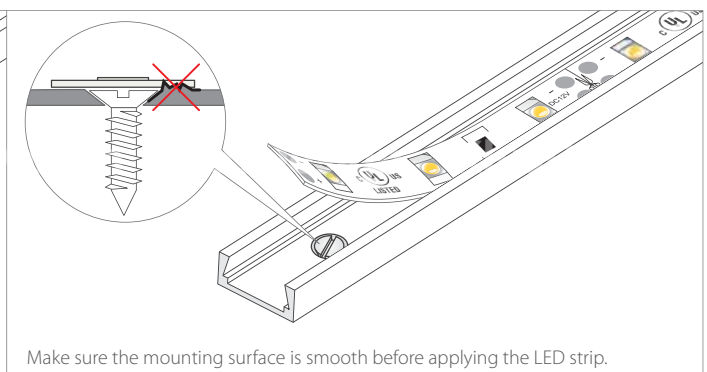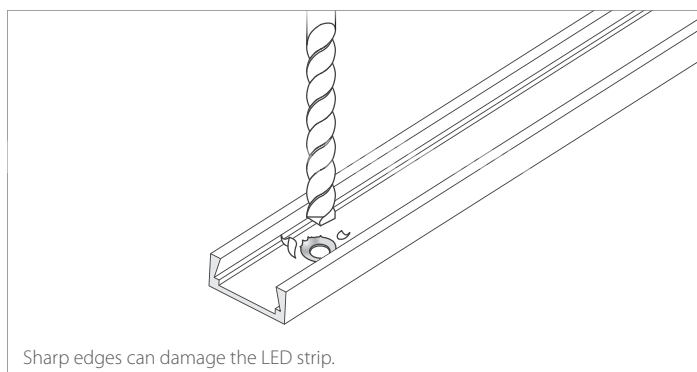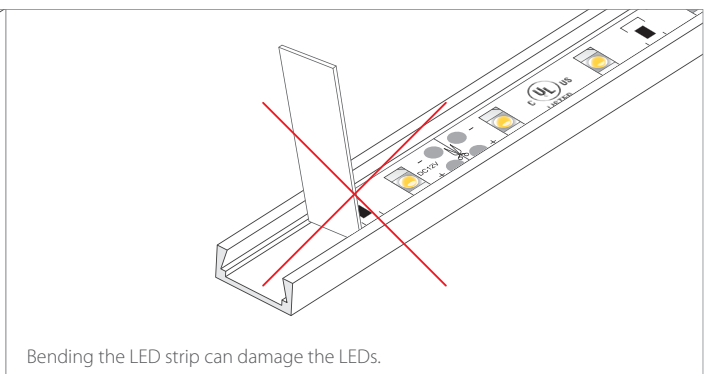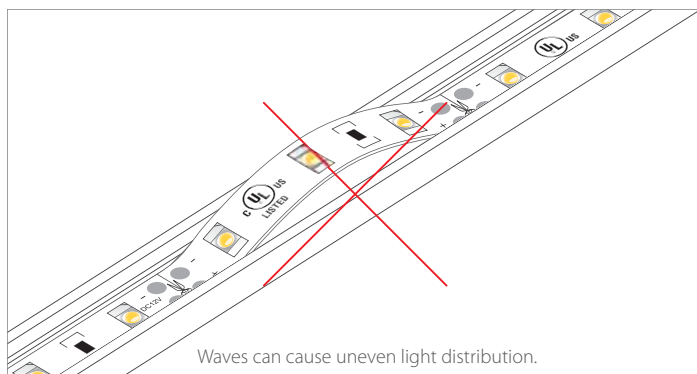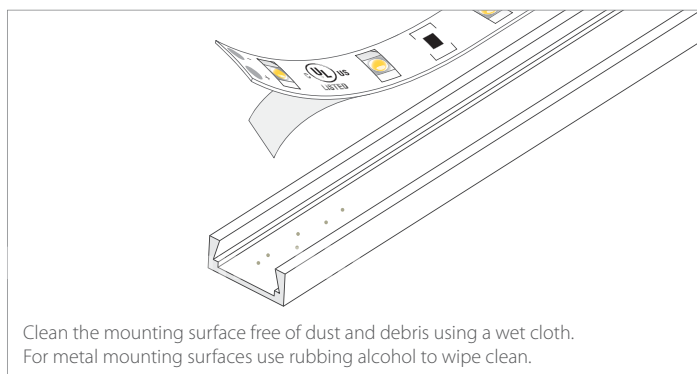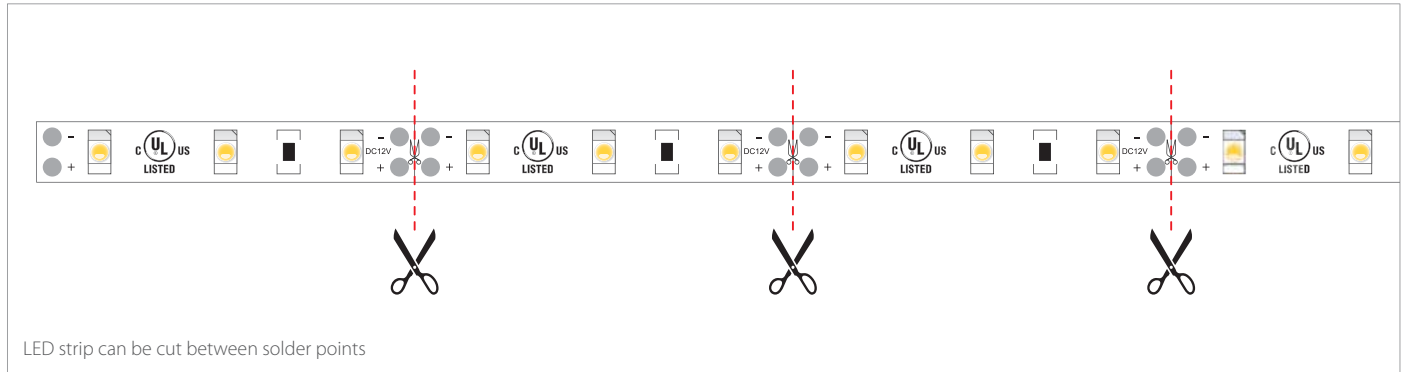

gn KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign Kl

gn KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign Kl



KLUS

www.KlusDesign.com

KLUS, LLC
673 US Hwy 1,
Vero Beach, FL 32962
USA

Sales Department:

(Tel.) 772 321 2260
(Tel.) 772 569 6655
sophia@klusdesign.com

gn KlusDesign KlusDesign KlusDesign KlusDesign KlusDesign Kl

KLUS products are proprietary and protected under U.S. and foreign patent laws.
We reserve the right to change and modify our products.

© Copyright 2016. All rights reserved.



REF. (2016)