

# NHID-4 – 4" HID Metal Halide Downlights

Nora Lighting has expanded its line of HID Downlight fixtures with the addition of a 4-inch aperture series that utilize T4, T6, Par20 and GX10 MR16 Metal Halide sources from 20 to 70 Watts. The architectural housing features a steel constructed plaster frame, two adjustable universal mounting brackets, fingers on all sides to hold flat bar hangers, electronic ballast and inherent thermal protection. A selection of die-cast, high performance trims including aluminum reflectors in a range of beam distributions, baffle and adjustable elbow is available. All units are UL and cUL listed

**Ballast:** Electronic ballast is universal input (120-277V)

**Socket:** 4KV pulse rated porcelain socket supplied with trim. Eight -inch lead with molex connects trim to housing.


**Lamp Type:** PAR20, T4, T6 or GX10 MR16

**Ceiling Thickness:** Accepts from 1/2" to 1-1/4" ceiling thickness.

**Minimum Clearances:** Commercial frame-in requires minimum clearances of 3" from thermal insulation and 1/2" from adjacent building components.

**Bar Hanger Brackets:** Universal mounting brackets adjust 3-1/8" vertically, 3-7/8" horizontally and accept flat bar hangers, C-channel or 1/2" EMT conduit pipe. Also includes fingers on all sides to hold flat bar hangers.


**Junction Box:** Contains seven 7/8" knockouts and four Romex pryouts with strain relief. Listed for feed-through.

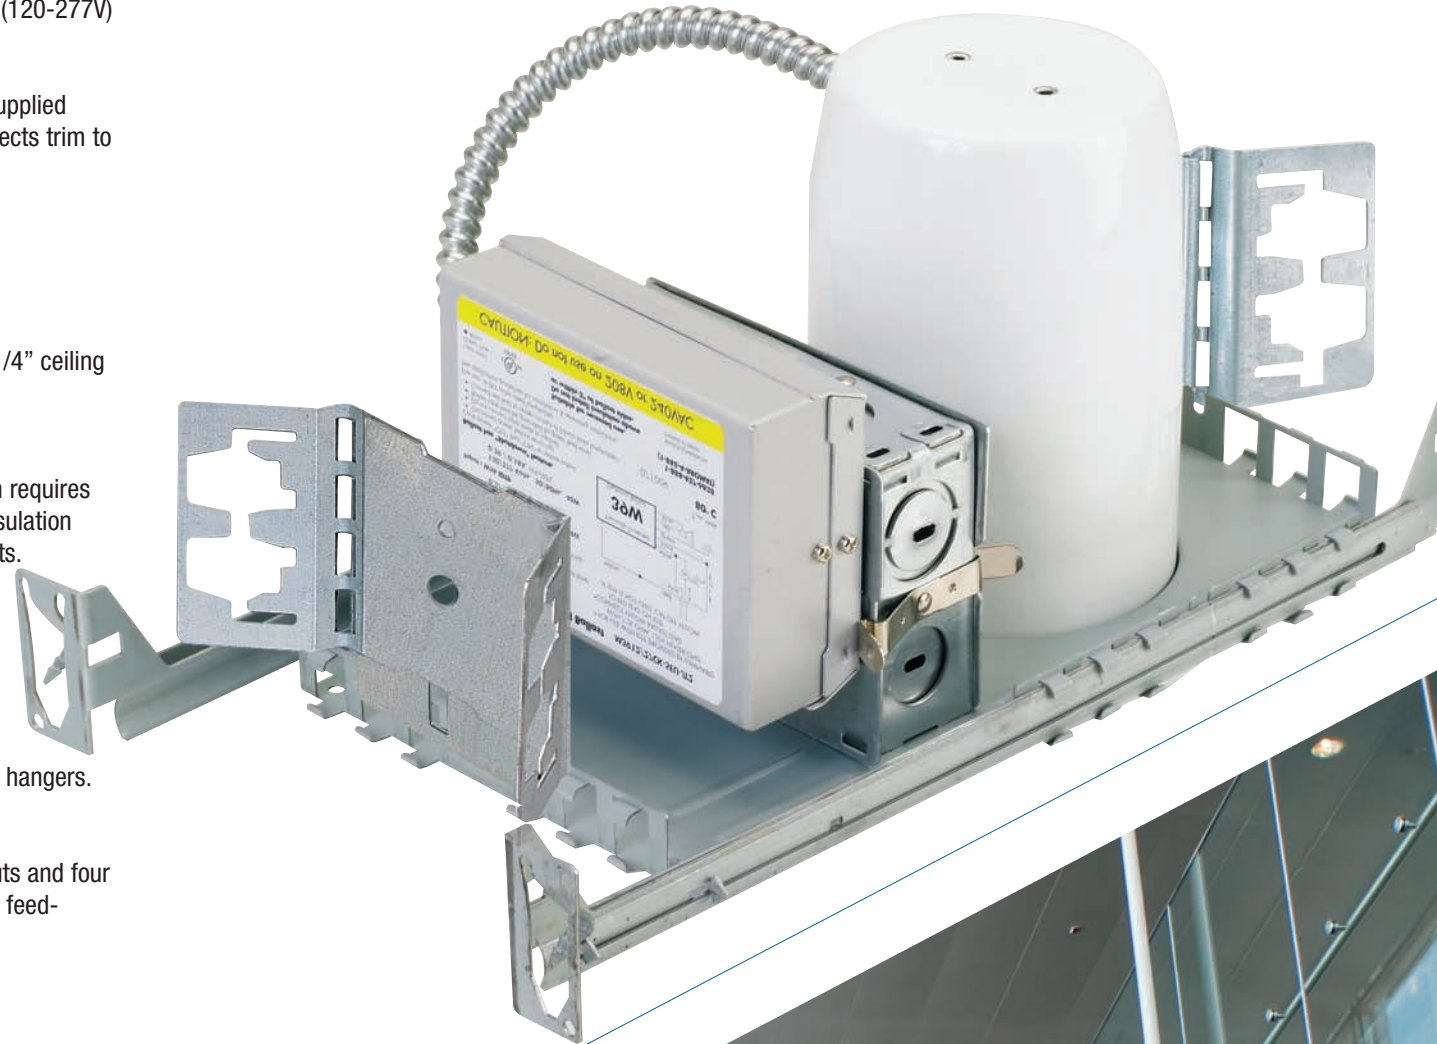

**NHID-420** - 4" HID Metal Halide Housing, 20W

**NHID-439** - 4" HID Metal Halide Housing, 39W

**NHID-470** - 4" HID Metal Halide Housing, 70W

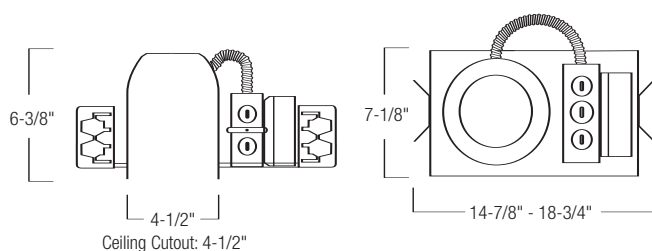

**NORALIGHTING**®

Tel: 800.686.6672

www.NoraLighting.com

# NHID-4 – 4" HID Metal Halide Downlights



**NHID-4P20** White  
HID Baffle Trim

Finish: W  
Lamp: 20W, 39W PAR20  
OD: 4-3/4"




**NHID-4T415** 15° beam spread  
**NHID-4T423** 23° beam spread  
**NHID-4T432** 32° beam spread  
HID Reflector

Finish: W  
Lamp: 20W, 39W, 70W T4  
OD: 4-3/4"

Beam spread





**NHID-4GX10** White  
HID Adjustable Trim

Finish: W  
Lamp: 20W, 39W GX10  
OD: 4-3/4"  
Adjustable: 90° vertical, 359° rotation




**NHID-4T615** 15° beam spread  
HID Reflector

Finish: W  
Lamp: 39W, 70W T6  
OD: 4-3/4"



Lighting  
for  
Design



Tel: 800.686.6672

[www.NoraLighting.com](http://www.NoraLighting.com)

**NORA**  
LIGHTING®