

SAFETY & WARNINGS

1. READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- Install in accordance with national and local electrical code regulations.
- This product is intended to be installed and serviced by a qualified, licensed electrician.
- 4. Do not use if there is any damage to fixture or wiring. Inspect periodically.
- 5. Do not submerge fixture in liquids or use the product in the vicinity of standing water or other liquids.
- 6. Do not install near areas with exposure to salt water or chlorinated water.
- 7. Do not install in direct sunlight or damage to the LED phosphor will occur.
- 8. Do not attempt to fix this product in the field.
- 9. Failure to follow safety warnings, and installation instructions will be void the warranty for this product.








QUICK SPECS / MODELS

Input	120V-277VAC
Power	100w or 200w
Ambient Temp †	-4° - 122°F (-20° - 50°C)

† Do not install product in environment outside listed temperature.

INSTALLATION GUIDE

REQUIRED TOOLS

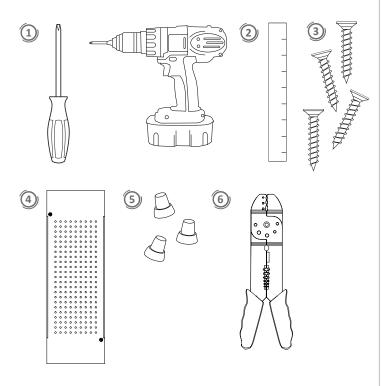

- 1. Phillips-head Screwdriver and/or Power Drill
- Rulei
- 3. (4x) Appropriate Mounting Screws Wood/Concrete etc.
- 4. Junction Box
- 5. (3x) Twist-On Wire Connectors
- 6. Wire Strippers


INSTALLATION





SHOCK HAZARD! May result in serious injury or death.

Turn power OFF at circuit breaker prior to installation.




DETERMINE LOCATION TO INSTALL COMPONENTS

*NOT FOR USE IN SUBMERSIBLE APPLICATIONS, OR WITHIN 5 FEET OF A SWIMMING POOL.

MOUNTING BRACKET MEASUREMENTS

Recessed Canopy measurements*




*Note: Above listed measurements are the same for 2 module, and 3 module fixtures.

INSTALLATION GUIDE

INSTALLATION (CONT.)

Surface Mount Canopy measurements*

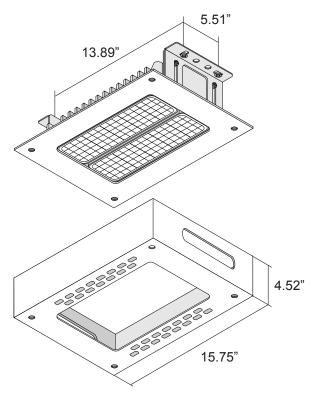


*Note: Above listed measurements are the same for 2 module, and 3 module fixtures.

3) ATTACH MOUNTING BRACKETS


(a) RECESSED CANOPY

Use included screws to attach mounting brackets to VOLANTE™ LED Recessed Canopy Light.



(b) SURFACE MOUNT CANOPY


Use included screws to attach mounting brackets to VOLANTE™ LED Surface Mount Canopy Light.



4) MOUNT CANOPY

(a) RECESSED CANOPY


Use appropriate mounting screws (not included) to mount canopy to studs, or support braces.

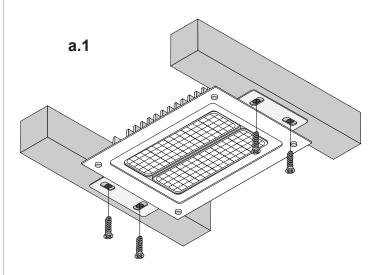

INSTALLATION GUIDE


INSTALLATION (CONT.)

Place canopy within 15.75" x 15.75" opening.

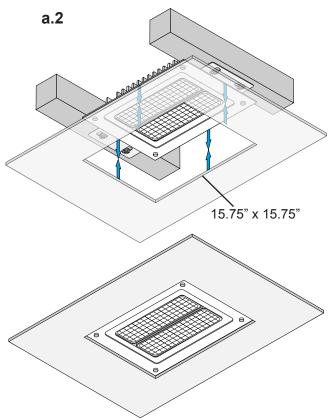


(b) SURFACE MOUNT CANOPY

Use appropriate mounting screws (not included) to attach VOLANTE™ Canopy fixture to surface. Ensure mounting screws are secured through to studs, or support braces.

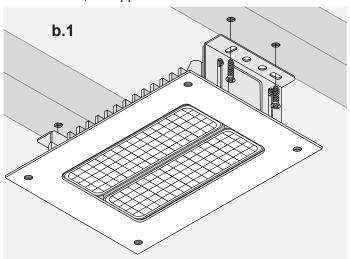

Use included screws to attach cover to fixture.

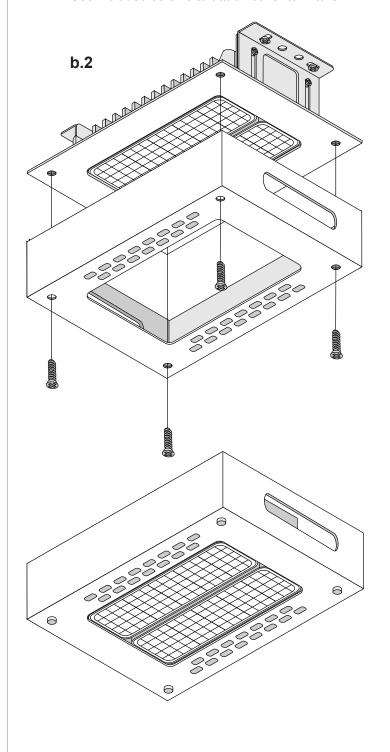


INSTALLATION GUIDE

INSTALLATION (CONT.)




CONNECT WIRING

Connect wiring to 120V-277V AC circuit within an appropriately rated junction box.








INSTALLING OUTDOORS?

If installing outdoors, ensure junction box is rated for outdoor use, and sealed properly before continuing.

6

TURN POWER ON AT CIRCUIT BREAKER



TROUBLESHOOTING

Lights are flickering

- This product is not dimmable. Only install on switching (On/Off circuit).
- Verify fixture is wired to a 120V-277VAC circuit.

Lights will not illuminate

- Ensure main power is turned On.
- Ensure breaker has not tripped.

TOOLS & RESOURCES

VOLANTE™ LED CANOPY LIGHT SPECIFICATION SHEET

For full specifications.



Toll Free: 877.817.6028 | Fax: 415.592.1596 | www.DiodeLED.com | info@DiodeLED.com © 2015 Elemental LED Inc. All rights reserved. Specifications are subject to change without notice.