

## PRODUCT DESCRIPTION

- For indoor/outdoor ground installation
- Designed for IP68 and IK10 protection ratings
- Corrosion resistance at high salinity
- Corresponds to the width of the HR-OPTI facade system

### FINISH :

Silver anodized 

Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

## TECHNICAL SPECIFICATION

### Application

- warning and decorative lighting

### Mounting

- in the ground, with mounting adhesive and a dedicated mounting track
- the cover is cut to the length of the profile


### Additional information

- possibility of smooth transition from a recessed into a surface-mounted fixture
- use of clips facilitates the assembly of the lighting fixture
- compatible with a dedicated HR-MAX-T and HR-MAX-TW mounting tracks

## AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
C1829ANODA_2	Silver anodized	78.75"
C1829ANODA_3	Silver anodized	118.11"


## TECHNICAL DRAWING

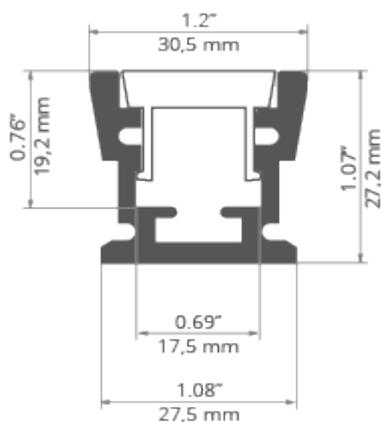

## RELATED EXTRUSIONS



HR-MAX-T  
mounting track  
Ref: C1827



HR-MAX-TW  
Mounting track  
Ref: C1828

## RELATED PRODUCTS

### COVERS

### SEMI-TRANSPARENT COVERS



HR-21 frosted  
Cover  
Ref: 17152

### END CAPS

### REGULAR END CAPS



HR-MAX-STN End  
cap  
Ref: 24388

## ACCESSORIES

### SEALING COMPONENTS



Waterproof  
coupler  
Ref: 42702



Waterproof  
splitter  
Ref: 42703



M16x1,5-L90  
Angular gland  
Ref: 42289

### ADDITIONAL ITEMS



HR-MAX clip  
Ref: 24416



HR-MAX Pad  
Ref: 70547