

PRODUCT DESCRIPTION

- For installation on facades
- Designed for IP68 and IK10 protection ratings
- Corrosion resistance at high salinity
- Corresponds to the width of the HR-MAX facade system
- Adjustable lighting angle

FINISH :

Silver anodized 

Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

TECHNICAL SPECIFICATION

Application

- decorative lighting.

Mounting

- to the surface, using dedicated accessories,
- the cover is cut to the length of the extrusion.


Additional information

- possibility to fasten the lighting fixture with the back or side to the mounting surface,
- possibility of smooth transition from a surface-mounted into a recessed fixture.

AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
C1844ANODA_2	Silver anodized	78.75"
C1844ANODA_3	Silver anodized	118.11"

TECHNICAL DRAWING

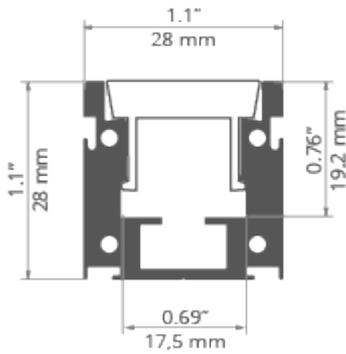

RELATED PRODUCTS

COVERS

SEMI-TRANSPARENT COVERS



HR-21 frosted
Cover
Ref: 17152

END CAPS

REGULAR END CAPS



HR-OPTI-STN End
cap
Ref: 24387

ACCESSORIES

FASTENERS & MOUNTING ACCESSORIES



HR-OPTI
Mounting
bracket
Ref: 42121

SEALING COMPONENTS



Waterproof
coupler
Ref: 42702



Waterproof
splitter
Ref: 42703



M16x1,5-L90
Angular gland
Ref: 42289