


The Cancun™

FP80110B Fan




SPECIFICATION SHEET

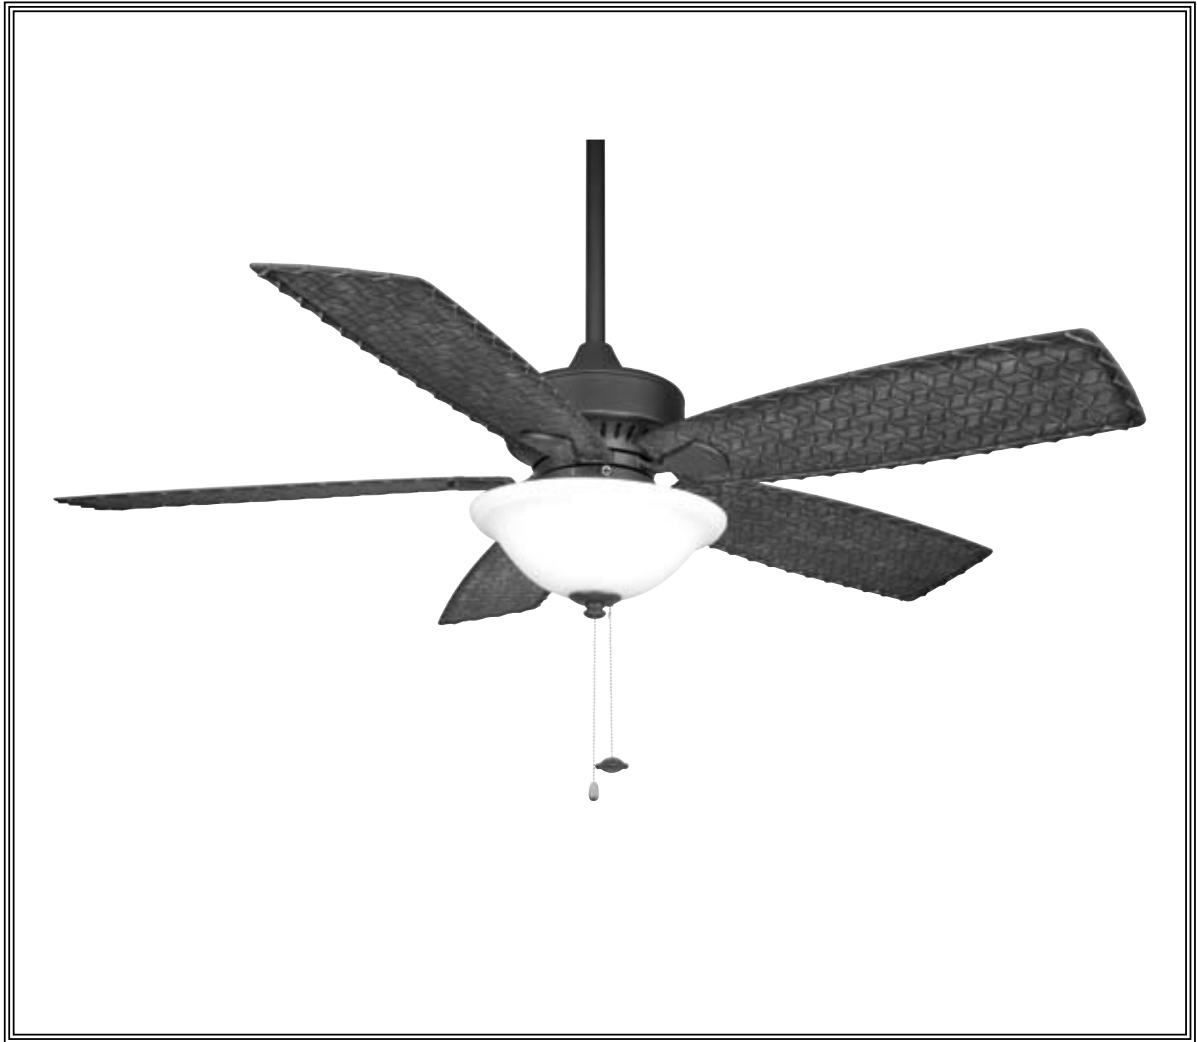

Product Specifications Subject To Change

The Cancun™ Fan Assembly – FP8011OB

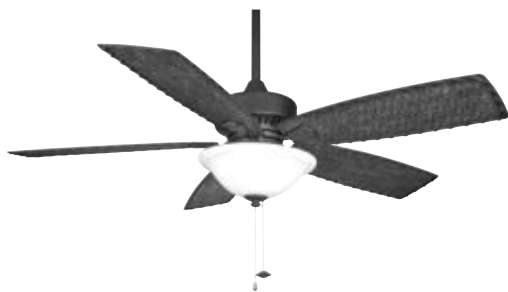

Fan Assembly - FP8011OB	
Distance from Ceiling to Blade Edge (with 4.5" DR)	11.98"
Blade Sweep / Pitch	52" / 14°
Housing Diameter	9.06"
Canopy Diameter	5.75"
Net Hanging Weight: (with Light Kit)	23.85 lbs

Distance from Ceiling to Bottom of Downlight	
Fan w/4.5" downrod	18.7"
Fan w/12" downrod	26.2"
Fan w/18" downrod	32.2"
Fan w/24" downrod	38.2"
Fan w/36" downrod	50.2"
Fan w/48" downrod	62.2"
Fan w/60" downrod	74.2"
Fan w/72" downrod	86.2"

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	156	5848	85	0.58	69
Med	94	3691	136	0.37	27
Low	48	2111	205	0.23	10

Available Finishes	
OB	Oil-Rubbed Bronze

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

CONTROL OPTIONS:

CWRL4** wall control and CRL4WH and CRL8TS remote controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

A 3-bulb (60 watt max candelabra bulbs - included) downlight fixture with frosted glass is included with this fan assembly. Maximum downlight wattage not to exceed 180 watts.

DOWNROD OPTIONS:

The Cancun™ fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Cancun™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call your local dealer for more information.

BLADE SETS:

A set of 5 damp location rated all-weather antique bamboo finish blades is included.

DAMP LOCATION:

Fan is rated for dry and damp location usage.



Copyright 2010 Fanimation, Inc.

10983 Bennett Parkway
 Zionsville, IN 46077
 Toll Free (888) 567-2055
 FAX (866) 482-5215
 Outside U.S. call (317) 733-4113
 Visit Our Website www.fanimation.com



2010/01