

## PRODUCT DESCRIPTION

- The open style structure of the mounting channel and its adjustable elements (bridges) eliminates the need for unsightly inspection openings in the ceilings
- The lighting fixture can be removed and remounted without damaging the ceiling
- The profile can be mounted "from below" and thus build ceiling lighting fixtures that run "wall to wall"
- Linear and polygonal connections are possible with ZM connectors
- Secure mounting resistant to vibration



### FINISH :

Non anodized (raw) 

Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

## TECHNICAL SPECIFICATION

### Application

- for the construction of professional lighting fixtures with a cover mounted flush with the ceiling or wall surface
- for LED lighting fixtures recessed in the ceiling, installed and serviced as a system
- for creating precise mounting channels in drywall for LED lighting fixtures (RAM-3035-KOZE)

### Mounting


- embedding the "mounting channel" (RAM-3035-KOZE) in the surface of a drywall ceiling
- mounting the "core" of the lighting fixture (3035-O) in the "mounting channel" (RAM-3035-KOZE)

### Additional information

- 3035-KOZE fixtures are designed for 2 LED tapes (0.39" / 10 mm wide) or 2 LED tapes (0.31" / 8 mm wide)
- the profile fits in the thickness of two drywall panels
- the lighting fixture is designed so that the "core" of the lighting fixture (profile with LED tapes and end caps) can be prepared in advance, in factory conditions.  
The only thing to be done at the installation site is to insert the prepared "core" (3035-O) into the pre-installed mounting channel (RAM-3035-KOZE)
- two locking bolts must be used for every 39.4" / 1 m of lighting fixture. For lighting fixtures shorter than 39.4" / 1 m, at least 2 bolts must be used
- the width of the gap in the drywall for (RAM-3035-KOZE): from 2.60"/66 mm to 2.80"/71 mm
- covers must be cut 0.07" / 2 mm shorter than the aluminum extrusions on both ends (creating 0.07" / 2 mm gaps on both ends of the lighting fixture)

span {font-weight:600;}


**Scheme: 3035-KOZE Extrusion system**

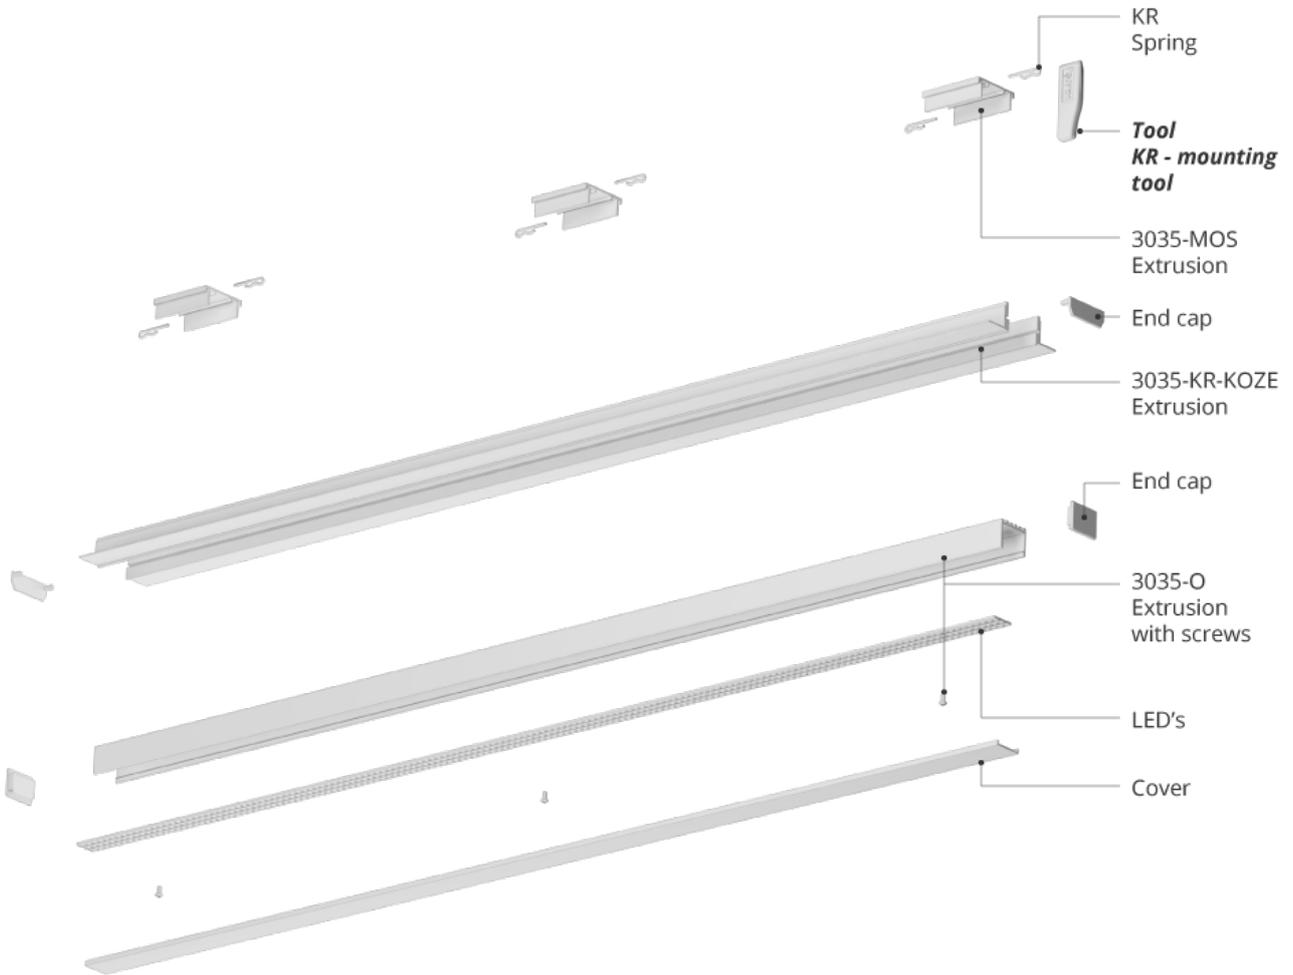


**AVAILABLE LENGTHS**

Ref. nr.	surface finish	available lengths
----------	----------------	-------------------

**TECHNICAL DRAWING**

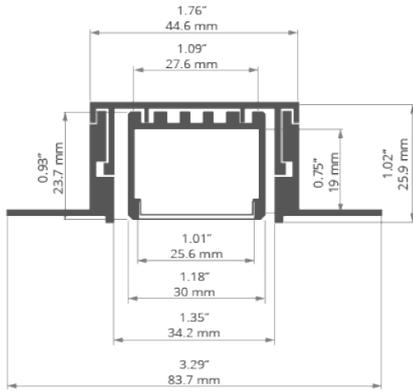

## RELATED EXTRUSIONS



3035-O  
Extrusion  
Ref: B8441



RAM-3035-KOZE  
Extrusion  
Ref: 18056